



**Plastic
Standard**

Plastic Waste Reduction Program Methodology

PWRM0002

PLASTIC WASTE MECHANICAL
RECYCLING METHODOLOGY

Version 1.0

10 February 2021

This methodology was developed by:



CONTENTS

1	SOURCES	3
2	SUMMARY DESCRIPTION OF THE METHODOLOGY	4
3	DEFINITIONS	4
4	APPLICABILITY CONDITIONS	7
5	PROJECT BOUNDARY	10
6	BASELINE SCENARIO	10
7	DEMONSTRATION OF ADDITIONALITY	11
	Step 1: Regulatory Surplus	12
	Steps 2, 3a and 3b: Demonstrating Additionality of the Project Activity	14
8	QUANTIFICATION OF PLASTIC WASTE RECYCLING	21
	8.1 Baseline Recycling	21
	8.2 Project Recycling	25
	8.3 Net Recycled Plastic Waste	25
9	MONITORING	26
	9.1 Data and Parameters Available at Validation	26
	9.2 Data and Parameters Monitored	29
	9.3 Description of Monitoring Plan.....	32

1 SOURCES

This methodology references certain procedures set out in the following methodologies and tools:

- Clean Development Mechanism (2018). *AMS-III.AJ. Small-scale methodology: Recovery and recycling of materials from solid wastes, version 07.0*
- Clean Development Mechanism (2018). *AMS-III.BA. Small-scale methodology: Recovery and recycling of materials from e-waste, version 02.0*
- Clean Development Mechanism (2019). *CDM-EB50-A30-STAN. Standard: Sampling and surveys for CDM project activities and programmes of activities, version 08.0*
- Clean Development Mechanism (2015). *CDM-EB67-A06-GUID. Guideline: Sampling and surveys for CDM project activities and programmes of activities, version 04.0*
- Clean Development Mechanism (2012). *Methodological tool 01: Tool for the demonstration and assessment of additionality, version 07.0.0*
- Clean Development Mechanism (2017). *Methodological tool 02: Combined tool to identify the baseline scenario and demonstrate additionality, version 07.0*
- Clean Development Mechanism (2019). *Methodological tool 21: Demonstration of additionality of small-scale project activities, version 13.0*
- Clean Development Mechanism (2019). *Methodological tool 27: Investment analysis, version 10.0*
- EUCertPlast Technical Committee (2019). *EUCertPlast Audit Scheme, version 4.0*

The following have also informed the development of this methodology:

- IPCC (2019). Solid waste disposal. In: *Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories, Vol. 5*
- *ISO 14040:2006 Environmental management – Life cycle assessment – Principles and framework*
- *ISO 14064-2:2006 Greenhouse gases – Part 2: Specification with guidance at the project level for quantification, monitoring and reporting of greenhouse gas emission reductions or removal enhancements (clause 4)*
- *ISO 15270:2008 Plastics – Guidelines for the recovery and recycling of plastics waste*
- Textile Exchange (2019). *TE-101-V1.0-2019.10.01 – Terms and definitions for Textile Exchange standards and related documents*

2 SUMMARY DESCRIPTION OF THE METHODOLOGY

Additionality and crediting methods	
Additionality	Activity and project methods
Crediting baseline	Project method

This methodology provides procedures to estimate the additional plastic waste¹ recycled through mechanical recycling activities, including the installation of new recycling facilities, capacity additions to or technology improvement of existing recycling facilities, and incentivizing or facilitating an increase in the collection and/or sorting of plastic waste.

Recycling activities may include collection, sorting and/or mechanical recycling (i.e., production of recycled material) of plastic waste that otherwise would have been managed in a way that would not allow for a second life of the material.

Projects that result in both collection and mechanical recycling of plastic waste shall apply this methodology in conjunction with an approved plastic waste collection methodology to demonstrate additionality and quantify the plastic waste collected and recycled by the respective activities.

Sections that are not applicable to projects using the *Plastic Waste Reduction Standard (Plastic Standard)* only to account for the results of their recycling activities and not to issue Waste Recycling Credits are marked as such.²

3 DEFINITIONS

In addition to those set out in the *Plastic Waste Reduction Program Definitions*, the following definitions apply to this methodology:

Capacity addition

An increase in the capacity of an existing recycling facility through the addition of new equipment, replacement or modification of existing equipment and/or modification of the recycling process

Collected material

Plastics material that has been removed from the environment or recovered, separated, diverted or removed from the solid waste stream in order to ensure suitable end of life, such as recycling, landfill

¹ In this document, the term plastic waste refers to all waste that includes materials under the scope of the Plastic Waste Reduction Program (Plastic Program), including composite materials (e.g., used beverage cartons).

² In this *Plastic Waste Mechanical Recycling Methodology, v1.0*, this is Section 7.

or incineration with energy recovery (adapted from *ISO 15270:2008 Plastics – Guidelines for the recovery and recycling of plastics waste*). This can include post-consumer and post-industrial material.

Collection area

The geographic area from which plastic waste is collected (e.g., households, businesses). Where plastic waste is collected from a concentrated source (e.g., landfill, waste aggregation center, sorting center), or from geographic areas outside the project boundary (excluding imported plastic waste), the collection area should include both the source and the surrounding geographic areas from where the waste originated.

Contaminant

Unwanted substance or material. Contaminants may include, but are not limited to, liquids, organic matter, and other plastic types and materials.

Energy recovery

The production of useful energy through direct and controlled combustion (*ISO 15270:2008 Plastics – Guidelines for the recovery and recycling of plastics waste*)

Extended producer responsibility (EPR)³

A policy approach under which producers are given a significant financial and/or physical responsibility for the treatment or disposal of post-consumer products

Input

Product, material or energy flow that enters a unit process (*ISO 14040:2006 Environmental management – Life cycle assessment – Principles and framework*)

New activity

Initiation of a new recycling activity at a site where this recycling activity did not exist prior to project implementation

Open burning of waste⁴

Uncontrolled waste combustion practices, including dump fires, pit burning, fires on bare soil and barrel burning. Open burning is characterized by burning at low temperatures (between 250 °C and 700 °C) and in oxygen-deprived environments, leading to incomplete combustion of waste. It also refers to burning conducted in a manner such that combustion exhaust is not effectively controlled and combustion products are not vented through a stack or chimney. The following burning practices are included in this definition:

³ Organisation for Economic Co-operation and Development (n.d.). *Extended Producer Responsibility*. Available at: <https://www.oecd.org/env/tools-evaluation/extendedproducerresponsibility.htm>.

⁴ R20 Regions of Climate Action (2016). *Open Burning of Waste: A Global Health Disaster*. Available at: https://regions20.org/wp-content/uploads/2016/08/OPEN-BURNING-OF-WASTE-A-GLOBAL-HEALTH-DISASTER_R20-Research-Paper_Final_29.05.2017.pdf.

- **Residential open burning:** The indiscriminate burning by individuals of waste that is never collected or is collected and dumped away from dumpsites. This can occur just outside the home or in places where waste is illegally dumped, such as roadsides or other open public spaces. Occurs primarily due to its convenience and a lack of sufficient collection systems.
- **Deliberate open burning in landfills and at open dumpsites:** Waste in landfills and open dumpsites is often burned to reduce its volume when these sites are filled beyond their capacity or have an unknown, and likely insufficient, capacity due to the lack of planning involved in their establishment.
- **Spontaneous open burning in landfills and at open dumpsites:** Fires can occur spontaneously and unintentionally in large piles of trash within open dumpsites and landfills. These fires are likely caused by the lack of waste treatment, other than burning, that occurs in these disposal areas.

Output

Product, material or energy flow that leaves a unit process (*ISO 14040:2006 Environmental management – Life cycle assessment – Principles and framework*)

Process

A set of interrelated or interacting activities that transforms inputs into outputs (*ISO 14040:2006 Environmental management – Life cycle assessment – Principles and framework*)

Recyclable

Characteristic of a product, packaging, or associated component that can be diverted from the waste stream through available processes and programs and can be collected, processed, and returned to use in the form of raw materials or products (*ISO 18604:2013 Packaging and the environment – Material recycling*). An item of packaging or a packaging component is recyclable if its successful post-consumer collection, sorting and recycling is proven to work in practice.⁵ Recyclable here refers to mechanically recyclable.

Recycled products

The physical goods that result from a product manufacturing process using recycled materials. Note that recycled products may be made from only recycled material or a combination of both recycled and virgin (including both fossil- and bio-based) material. Recycled products refer to the next-use stage of the recycled material. It may be possible to further recycle the recycled product after its intended use.

Recycling activity

An activity that is considered eligible under this methodology in accordance with Section 4. Recycling activities may include collection, sorting and/or mechanical recycling of plastic waste.

⁵ Adapted from Ellen MacArthur Foundation (2018). *New Plastics Economy Global Commitment*. Available at: <https://www.newplasticseconomy.org/assets/doc/13319-Global-Commitment-Definitions.pdf>.

Region

The spatial extent that covers preferably the geographic area containing the source of the plastic waste, the project activity, and the end destination of the plastic waste collected and/or recycled by the project activity; and at most covers the host country or countries in which the project activity and the end destination are located. The applicable geographic area may be an administrative unit (e.g., municipality, district, state or country), based on the availability of data.

4 APPLICABILITY CONDITIONS

This methodology is applicable when all of the following conditions are met:

1) Project activities result in mechanically recycled plastic waste through one or more of the following:

- a) Installation of a new recycling facility
- b) Capacity addition to or technology improvement of an existing recycling facility (e.g., retrofit or modification of an existing recycling facility, such as installation of new equipment or replacement of old equipment, which results in increased recycling capacity)
- c) Incentivizing and/or facilitating an increase in the collection and/or sorting of plastic waste to enable an increase in its mechanical recycling (e.g., paying price premiums to collectors, establishing collection or sorting points at landfills, sorting recyclable plastic waste)

Projects that enable an increase in mechanical recycling of plastic waste through collection and/or sorting activities shall apply the methodology as a joint project with the mechanical recycler and include the recycling facility in the project boundary.

2) The plastic waste being recycled is either collected or diverted from:

- a) The environment;
- b) Landfill;
- c) Open burning;
- d) Incineration with energy recovery;
- e) Households and/or commercial entities;
- f) Incineration without energy recovery; or
- g) Any other waste management option that does not allow for a second life of the plastic waste.

3) It is possible to directly measure and record the final output of the recycling facility (i.e., the weight of materials leaving the recycling facility on a dry basis) segregated by material type.

- 4) Credible evidence such as contractual agreements, receipts of sale of recycled material or third-party survey results can be provided to show that the recycled material supplied by the mechanical recycling facility will be used for processing or manufacturing of recycled products, thereby displacing the use of virgin plastic. In all cases, credible evidence shall be provided from a source that can be verified by the validation/verification body (VVB).

Exceptions are made for projects that include the recycling of composite materials that contain plastic, where the following shall be demonstrated instead:

- a) Plastic polymers cannot be separated out from the composite material and recycled independently (e.g., lack of accessible technology to separate the layers of the composite material to independently recycle each plastic component); and
- b) The project implements a suitable application for the recycled material that is designed to be durable (i.e., lifetime of more than 10 years). This can be demonstrated through, among others, evidence of product development to extend the lifetime of the recycled product or results of product testing for durability. Independent quality studies of similar products (i.e., products made of a similar combination of materials, with similar characteristics to the materials in the project activity and a similar resulting application) may also be used to demonstrate durability. Where the project activity includes the manufacture of recycled products from composite materials, applications that combine the composite materials with other plastic waste such that it is not possible to separate the additional materials for recycling after use should be avoided.

In all cases, credible evidence shall be provided to show that the waste materials will not be mixed with toxic materials or substances (e.g., coatings, adhesives or colorants) that could become unsafe if compressed, combined or exposed to high temperatures during the recycling process. This can be demonstrated by providing a list of input materials and expected exposures during recycling. Where feasible and to distinguish themselves, projects may choose to demonstrate the quality of the recycled material based on standardized quality tests of representative samples of the recycled material.

- 5) There is recyclable plastic waste available in the region that would not have been recycled in the absence of the project. Availability of recyclable plastic waste may be demonstrated by, among others, using the most recent publicly available data on plastic waste generation and recycling rates in the region to show that there is plastic waste that is not being recycled.
- 6) The project activity does not compete with other recycling activities or include plastic waste that has been diverted from a historically existing, legally recognized recycling activity. Evidence, such as proof of how the plastic waste was managed over the three-year period prior to implementation of the project activity, shall be provided to demonstrate that the project activity does not divert plastic waste from any historically existing, legally recognized recycling activity.

- 7) Plastic waste that enters the project recycling facility but is not recycled or is lost during the recycling process (e.g., due to contamination) is managed in a way that does not include dumping on open land, in water bodies and/or at dumpsites; open burning; or incineration without energy recovery. Where a project can reasonably only access one of these excluded end destinations, the project proponent shall demonstrate that the nature of the end destination is comparable to the plastic waste source and shall provide justification for why the project is not reasonably able to access an alternative end destination. In all cases, open dumping of plastic waste onto open land or into water bodies is not permitted.

This methodology is not applicable under the following conditions:

- 8) The plastic waste to be mechanically recycled has been collected in and imported from other countries, except in either or both of the following circumstances:
- a) The project recycles plastic waste (using sustainable waste management practices) imported from a Least Developed Country (LDC)⁶ or Small Island Developing State (SIDS).⁷
 - b) The project imports plastic waste from other countries for further processing where there is insufficient plastic waste available in the exporting country to enable development of recycling infrastructure at the time of project validation. Project proponents shall demonstrate the same through primary surveys or secondary literature available in the public domain and/or certified by a competent authority.⁸

Where either or both of the above circumstances exist, a robust and transparent chain of custody from the source of plastic waste to the end destination of the project activity shall be provided.

⁶ United Nations Conference on Trade and Development (n.d.). *UN List of Least Developed Countries*. Available at: <https://unctad.org/en/Pages/ALDC/Least%20Developed%20Countries/UN-list-of-Least-Developed-Countries.aspx>.

⁷ United Nations Office of the High Representative for the Least Developed Countries, Landlocked Developing Countries and Small Island Developing States (n.d.). *List of SIDS*. Available at: <https://www.un.org/ohrlls/content/list-sids>.


⁸ A competent authority denotes an entity that has been authorized by the concerned regulatory body or the overseeing local or national government body/department/ministry or an internationally recognized organization to execute and/or certify the task in question. The same is subject to verification by the VVB.

5 PROJECT BOUNDARY

The spatial extent of the project boundary is shown in Figure 1 and encompasses the following:

- 1) Plastic waste source;
- 2) Sorting facility, if separate from the recycling facility;
- 3) Facility where plastic waste is mechanically recycled up to the stage where recycled materials are produced; and
- 4) Entity or entities that purchase recycled material from the recycling facility.

Figure 1: Spatial extent of the project boundary

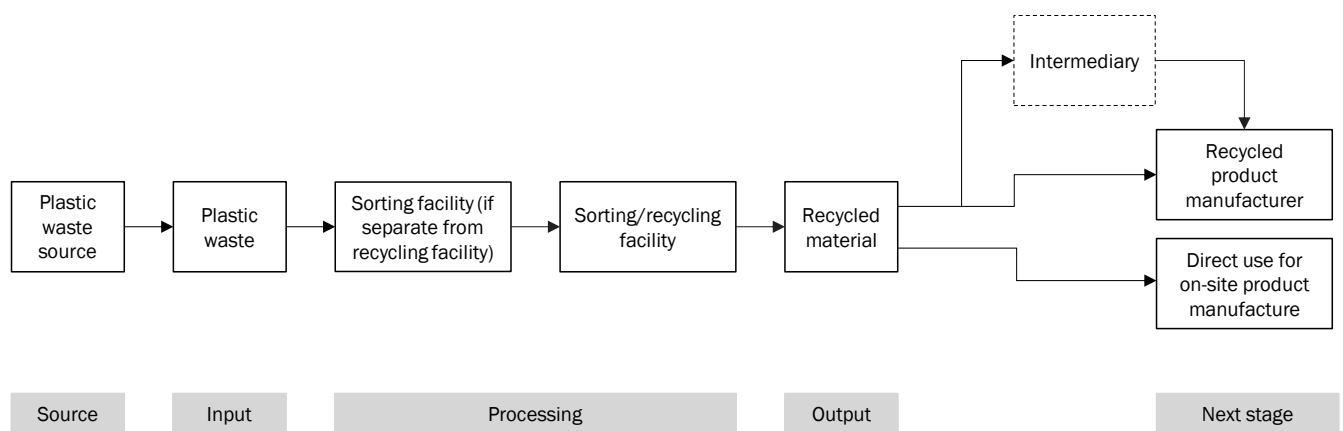

6 BASELINE SCENARIO

The baseline scenario is that in which, without project implementation, the plastic waste would not have been recycled.

This methodology uses a project method to determine the crediting baseline, as outlined in Section 8.1.

7 DEMONSTRATION OF ADDITIONALITY


Project proponents applying this methodology must determine additionality using the procedure shown in Figure 2 and described below.

All project proponents must first apply Step 1 to demonstrate regulatory surplus for recycling of each individual material type managed in the project activity.

Project proponents must then apply Steps 2, 3a or 3b to demonstrate additionality of the project activity. These steps shall be applied sequentially, starting with Step 2 (positive list). If the project activity is not on the positive list and therefore not automatically deemed additional, the project proponent shall proceed to Step 3a (penetration rate). If the penetration rate of the project activity is greater than or equal to 20 percent, the project proponent shall apply Step 3b (investment analysis). These steps require all material types managed in the project activity to be assessed collectively to enable assessment at the project level.

Although not mandatory, project proponents may apply more than one of these steps, where possible, to strengthen the demonstration of additionality.

Note – The requirements in this section do not apply to projects that intend to use the Plastic Standard solely for accounting purposes and not to issue Waste Recycling Credits.

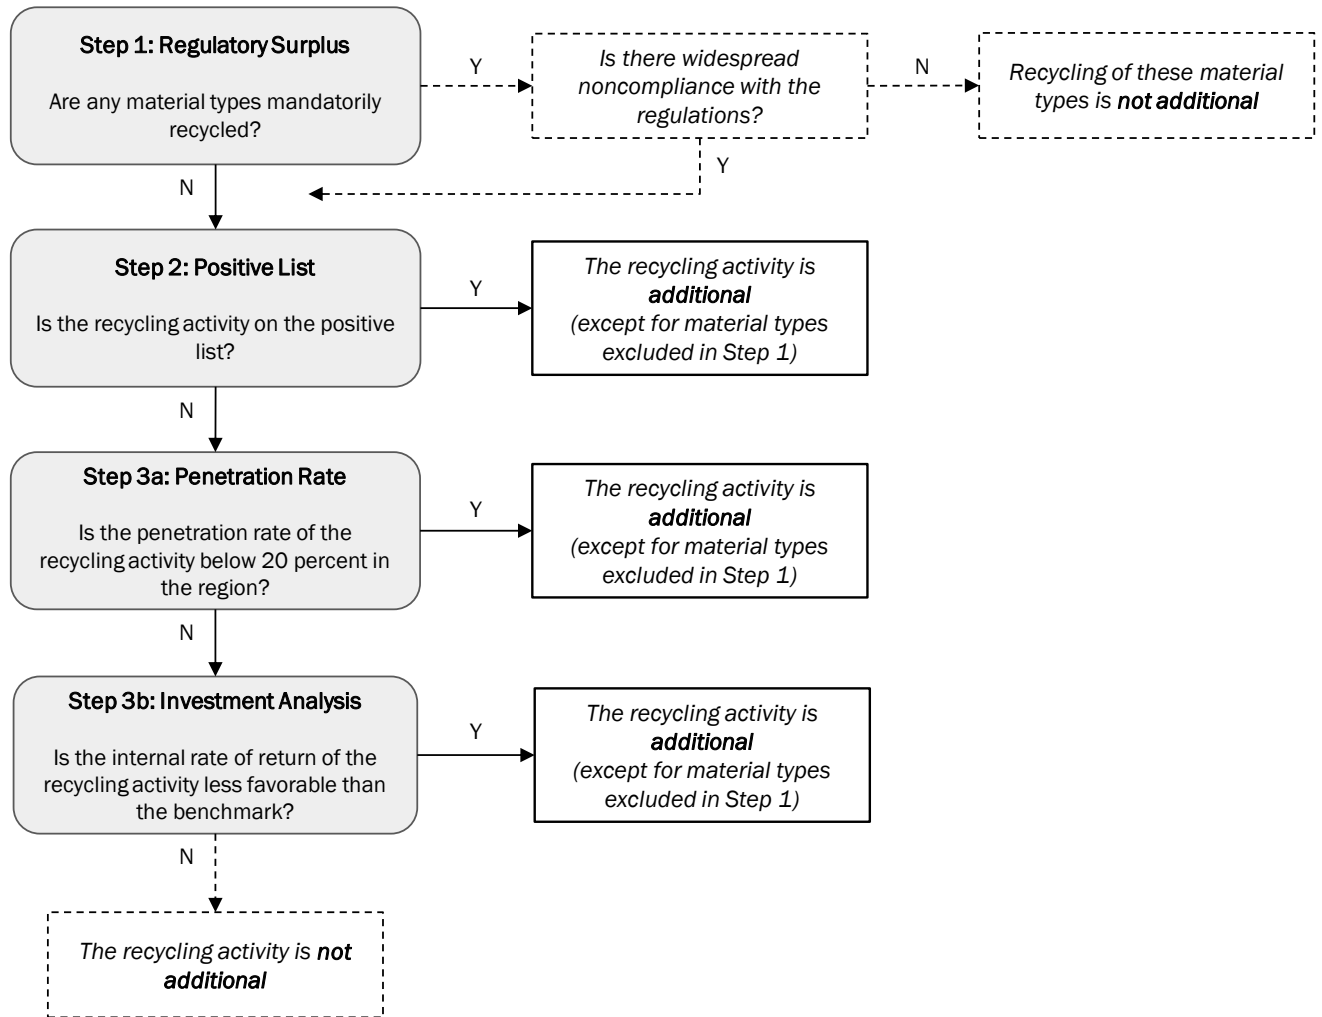Figure 2: Decision tree for demonstrating additionality


Step 1: Regulatory Surplus

The project proponent shall demonstrate that the project activity proactively exceeds the current regulations or the regulatory compliance scenario based on the following guidance.

The project proponent shall list all relevant national, regional and local laws and regulations for plastic waste treatment and end use specific to recycling in the relevant region. This does not include national and local policies that do not have a legally binding status. Project proponents shall demonstrate whether, based on an examination of current practice in the region in which the law or regulation applies, those applicable legal or regulatory requirements are systematically enforced and whether noncompliance with those requirements is widespread in the host country.

This list should also include all extended producer responsibility (EPR) schemes relevant to the project activity and material type(s) in the region. The existence of relevant EPR schemes shall not be used to indicate an existing legal requirement for the project activity unless the specific EPR scheme is mandatory. Mandatory schemes may include, among others, those required by law, those that could result in legal redress, and those that enable authorities at the national, regional or local level to require brands or private companies to undertake recycling of the relevant material type(s).

An assessment shall be conducted for each material type included in the project activity to determine if legal or regulatory requirements for recycling are applicable. Recycling of a certain material type is not considered additional if it is mandatory. If the project proponent can demonstrate that their project activity will exceed a specific mandatory threshold for recycling of a certain material type, then project activities associated with the recycling of that material type may be considered additional.

Step 1 outcomes

Outcome 1: There are no laws or regulations that enforce recycling of the relevant material type(s) or the laws or regulations are not systematically enforced and noncompliance is widespread in the relevant country or region. Proceed to Step 2.

Outcome 2: There are laws and/or regulations that enforce recycling of some (but not all) of the material types recycled in the project activity. The recycling of these material types is not additional. Exclude the material types for which recycling is not additional and proceed to Step 2.

Outcome 3: There are laws and/or regulations that enforce recycling of all of the material types recycled in the project activity. Recycling of the material type(s) and the project activity are not additional.

Steps 2, 3a and 3b: Demonstrating Additionality of the Project Activity

Additionality of the project activity shall be demonstrated using one or more of the following three approaches: Steps 2 (positive list), 3a (penetration rate) and/or 3b (investment analysis). These steps shall be applied sequentially, with projects first applying Step 2 (positive list).

Step 2: Activity Method – Positive List⁹

Project activities are deemed automatically additional if the entire project activity, including all material types for which recycling is deemed additional in Step 1, constitutes at least one of the following. Both the plastic waste source and the recycling activity must be located in the region(s) specified.

- Recycling activity in a low-income country¹⁰
- Recycling activity in rural¹¹ areas of a lower-middle income country¹²
- Recycling activity including only mono-material flexible materials (e.g., films, carrier bags, pouches, pallet shrouds, including multi-layer plastics) or composite materials containing both plastic and non-plastic (both rigid and flexible, e.g., sachets, foils, envelopes, diapers, liquid packaging boards such as used beverage cartons) located in a lower-middle income country
- Recycling activity located on islands that can be classified as rural in a lower-middle or upper-middle income country¹³
- Recycling activity located in a Special Underdeveloped Zone (SUZ).¹⁴ An SUZ is a region in the host country that has been identified by the government in official notifications for development assistance, including for planning, management and investment, and that satisfies any one of the following conditions using the most recent data available:

⁹ Categories in the positive list have been determined based on the best data available on the extent of plastic waste recycling at the time the *Plastic Waste Mechanical Recycling Methodology, v1.0* was developed. Project activities set in a context where the available data indicate that there is high confidence that the project activity will be additional are included in the positive list.

¹⁰ The World Bank (2020). *World Bank Country and Lending Groups*. Available at: <https://datahelpdesk.worldbank.org/knowledgebase/articles/906519>.

¹¹ An administrative unit with a population density of less than 300 inhabitants per square kilometer (European Commission (2020). *A Recommendation on the Method to Delineate Cities, Urban and Rural Areas for International Statistical Comparisons*. Available at: <https://unstats.un.org/unsd/statcom/51st-session/documents/BG-Item3j-Recommendation-E.pdf>) or as defined in national regulations of the host country.

¹² The World Bank (2020). *World Bank Country and Lending Groups*. Available at: <https://datahelpdesk.worldbank.org/knowledgebase/articles/906519>.

¹³ Ibid.

¹⁴ Definition adopted from CDM (2018). *Methodological tool 19: Demonstration of additionality of microscale project activities, version 09.0*. Available at: <https://cdm.unfccc.int/methodologies/PAmethodologies/tools/am-tool-19-v9.pdf>.

- The proportion of the population with income (i.e., purchasing power parity) of less than 2 USD per day in the region is greater than 50 percent;
- The gross national income (GNI) per capita in the host country is less than 3,000 USD and the population of the region is among the poorest 20 percent in the poverty ranking of the host country as per the applicable national policies and procedures; or
- The proportion of the population in the region with income less than the national poverty line used by the host country for reporting on the United Nations Sustainable Development Goals (SDGs) is greater than 50 percent.

Step 2 outcomes

Outcome 1: The project activity is included in the positive list. The project activity is additional (except for any material types excluded in Step 1).

Outcome 2: The project activity is not included in the positive list. Proceed to Step 3a (penetration rate).

Step 3a: Project Method – Penetration Rate of Recycling Activities

The project proponent shall assess the penetration rate of the project activity in the relevant region for all material types managed in the project activity (except for any material types excluded in Step 1). The penetration rate (percent) is given as the ratio between the total installed recycling capacity (tonnes/year) for plastic waste (including composite materials), excluding other project activities undergoing validation or that are already registered with the Plastic Program, and plastic waste production (tonnes/year) in the region. If this penetration rate is below 20 percent,¹⁵ the project activity, including all material types recycled (other than any material types excluded in Step 1), is additional.

Any data or studies used in Step 3a to determine the penetration rate shall be no more than three years old at the time of validation.

The penetration rate of the project activity shall be assessed in accordance with the following:

- 1) The relevant region for which the values are being determined shall be the same as the collection area of the project activity for all project activities, except those included in Applicability Condition 8.
- 2) For activities that recycle plastic waste that has been collected in and imported from other countries (as per Applicability Condition 8b), the region used for this assessment shall be the entire country where the recycling activity is implemented.
- 3) The total generation of plastic waste (including composites), *G* (tonnes/year), in the region shall be determined using one of the following approaches:
 - a) Publicly available information (e.g., data from governments, local authorities, third-party studies); or
 - b) Based on population size in the region and plastic waste generation rates (kg/year per capita). If the project can demonstrate that there is no publicly available data on plastic waste generation rates and it is not reasonable to undertake market research due to a lack of technical, financial or temporal capacity, then the default values included in Table 1 may be applied to all material types within the project activity.

¹⁵ Following the 20 percent common practice threshold in CDM (2015). *Methodological tool 24: Common practice, version 03.1*. Available at: <https://cdm.unfccc.int/methodologies/PAMethodologies/tools/am-tool-24-v1.pdf>.

Table 1: Default values for plastic waste generation rates (kg/year per capita)¹⁶

Country	Urban ¹⁷	Rural ¹⁸
High income	76	76
Upper-middle income	31	21
Lower-middle income	21	11
Lower income	18	9

Where significant pre-existing plastic waste stocks (e.g., from landfills¹⁹) are available for recycling at validation in addition to plastic waste generated in the region, these can be included in G in amounts proportional to the first crediting period of the project. This shall be calculated by dividing the total recoverable amount available at validation by the number of years of the first crediting period. Evidence such as inventories from the landfill operator or third-party studies shall be provided and assumptions shall be conservative.

- 4) The total installed recycling capacity for plastic waste (including composite materials), C (tonnes/year), of all legally recognized recycling facilities that recycle plastic waste in the region shall be determined, based on data from local authorities or independent market research and excluding other plastic recycling project activities undergoing validation or that are already registered with the Plastic Program. Where such data are not available, the project proponent shall demonstrate how this capacity is determined in a credible way.

¹⁶ The figures in Table 1 were determined using values from Lau, W.W.Y. et al. (2020). Evaluating scenarios toward zero plastic pollution. *Science* 369, 1455-1461. Available at: <https://doi.org/10.1126/science.aba9475>. Plastic waste generated (Mt; Table S11) is divided by population (in millions; Table S10) in 2016 for each income category for both urban and rural areas. The authors recognize that waste generation and recycling rates may differ among material types, and there are data gaps within their study. The data are based on information from The World Bank and are provided as the most globally applicable dataset available at the time of publication of the *Plastic Waste Mechanical Recycling Methodology, v1.0*. This default dataset may be updated with subsequent revisions of the methodology as more accurate data become widely available.

¹⁷ An administrative unit with a population density of at least 300 inhabitants per square kilometer (European Commission (2020). *A Recommendation on the Method to Delineate Cities, Urban and Rural Areas for International Statistical Comparisons*. Available at: <https://unstats.un.org/unsd/statcom/51st-session/documents/BG-Item3j-Recommendation-E.pdf>) or as defined in national regulations of the host country.

¹⁸ An administrative unit with a population density of less than 300 inhabitants per square kilometer (European Commission (2020). *A Recommendation on the Method to Delineate Cities, Urban and Rural Areas for International Statistical Comparisons*. Available at: <https://unstats.un.org/unsd/statcom/51st-session/documents/BG-Item3j-Recommendation-E.pdf>) or as defined in national regulations of the host country.

¹⁹ Other examples of significant pre-existing plastic waste stocks include cases in which plastic waste has been collected from the environment but insufficient financial means exist to process the waste, thus it is left in a local site that is not a landfill, or where plastic waste has accumulated in the environment (e.g., in a ditch or along riverbanks).

- 5) Only plastic waste that can be realistically collected and recycled shall be accounted for. Where the project activity includes a specific material type for which reliable, publicly available information indicates that the penetration rate is higher than the average penetration rate calculated for all material types within the project activity combined, the calculation shall focus on this material type only.
- 6) The penetration rate (%), which is the ratio between the total installed recycling capacity and total plastic waste generation, shall be determined using the following equation:

$$Penetration\ Rate = \frac{C}{G} \times 100$$

(Equation 1)

Step 3a outcomes

Outcome 1: If the project activity has a penetration rate less than 20 percent, the project activity is additional (except for those material types excluded in Step 1).

Outcome 2: If the project activity has a penetration rate greater than or equal to 20 percent, proceed to Step 3b (investment analysis).

Step 3b: Project Method – Investment Analysis

The objective of the investment analysis is to demonstrate that the project activity is not economically or financially attractive.

The project proponent shall carry out the investment analysis using “Option III: Apply benchmark analysis,” including the sensitivity analysis, prescribed in the latest version of the CDM’s *Tool for the demonstration and assessment of additionality*. The latest approved versions of the methodological tools for *Demonstration and assessment of additionality* and *Investment analysis* shall be used when applying this step. The following additional guidance should be taken into account for the investment analysis of the project activity, combined for all material types, except for those material types excluded in Step 1:

- 1) The internal rate of return (IRR) of the project activity shall be used as the financial indicator.
- 2) Financial analysis shall be based on parameters that are standard in the market and not linked to the subjective profitability expectation or risk profile of a particular project proponent. Where the project activity can only be implemented by the project proponent (e.g., for capacity addition projects), the specific financial situation of the company undertaking the project activity may be considered.
- 3) All relevant costs²⁰ and revenues (excluding revenues from Plastic Credits, but including revenues from the sale of recycled material, and other revenues such as subsidies,²¹ or other fiscal incentives, where applicable) shall be included.
- 4) Where project activities share equipment or resources with other waste processing activities, such as chemical recycling or incineration with energy recovery, only the allocated costs²² and revenues²³ for mechanical recycling of material types for which regulatory surplus is demonstrated in Step 1 shall be included in the assessment. The cost allocation shall be conservative.
- 5) Benchmarks shall be derived from one of the following options:
 - a) Government bond rates, increased by a suitable risk premium to reflect private investment and/or the project type, as substantiated by an independent (financial) expert or documented by official publicly available financial data;
 - b) Estimates of the cost of financing and required return on capital (e.g., commercial lending rates and guarantees required for the recycling activity), based on bankers’ views and return required by private equity investors/funds for comparable projects;

²⁰ For example, investment; capital that needs to be repaid (e.g., loans); operational and maintenance (O&M) costs, such as the cost of sorting, shredding and recycling machinery; environmental equipment (e.g., water or air filters); staff wages; plastic waste materials; electricity usage.

²¹ For example, grants that do not need to be repaid, soft loans, contribution to O&M costs or deficit guarantees.

²² For example, investment costs of sorting equipment used by both mechanical and chemical recycling activities or shared O&M costs.

²³ For example, from the sale of energy, savings from energy purchase or sales from chemical recycling outputs.

- c) A company internal benchmark (the company's weighted average cost of capital), only in the particular case referred to in 2 of Step 3b. The project proponent shall demonstrate that this benchmark has been consistently used in the past, i.e., that project activities under similar conditions developed by the same company used the same benchmark;
 - d) Government/official approved benchmark where such benchmarks are used for investment decisions; or
 - e) Any other indicators, if the project proponents can demonstrate that the above options are not applicable and justification of the indicator is deemed appropriate by the VVB.
- 6) The investment analysis shall be provided in a transparent manner and shall include all relevant assumptions, preferably in the project description, or in a separate annex to the project description, so that a reader can reproduce the analysis and obtain the same results. The analysis shall refer to all critical techno-economic parameters and assumptions (e.g., capital costs, sale prices of the relevant material type(s), project lifetime) and justify assumptions in a manner that can be validated by the VVB.
- 7) A clear comparison of the financial indicator for the project activity and the financial benchmark shall be presented in the project description submitted for validation. If the project activity has a less favorable indicator (i.e., lower IRR) than the benchmark, the project activity cannot be considered financially attractive.
- 8) A sensitivity analysis shall be conducted as outlined in Section 7 in the CDM's *Methodological tool 27: Investment analysis* to show whether the conclusion regarding financial attractiveness is robust to reasonable variations in the key assumptions. The investment analysis provides a valid argument in favor of additionality only if it consistently supports (for a realistic range of assumptions) the conclusion that the project activity is unlikely to be financially attractive.

Step 3b outcomes

Outcome 1: If the IRR of the project activity is below the benchmark in all realistic scenarios of the sensitivity analysis, the project activity is additional (except for those material types excluded in Step 1).

Outcome 2: If the IRR of the project activity is above the benchmark in at least one of the realistic scenarios included in the sensitivity analysis, the project activity is not additional.

8 QUANTIFICATION OF PLASTIC WASTE RECYCLING

Project proponents shall use the equations below to calculate the amount of plastic waste recycled at baseline, the total amount of plastic waste recycled by the project activity and the additional amount of plastic waste recycled as a result of the project activity. The equations shall be applied only for material types for which recycling activities are additional as outlined in Step 1 of Section 7.

8.1 Baseline Recycling

Baseline recycled plastic waste is the amount of plastic waste that would have been recycled in the absence of the project activity.

Baseline recycled plastic waste is calculated as follows:

$$B_{recycled,y} = \sum_{i=1}^n B_{recycled,i,y} \times AF_i$$

(Equation 2)

Where:

$B_{recycled,y}$ = Baseline recycled plastic waste in year y (tonnes)

$B_{recycled,i,y}$ = Baseline recycled plastic waste of material type i in year y (tonnes)

AF_i = Adjustment factor for composite material i ; for non-composite materials, this factor is equal to 1.

The baseline recycled plastic waste for material type i is determined as follows:

- 1) For a new activity, use the following:
 - a) Baseline recycling equals zero, $B_{recycled,i,y} = 0$
- 2) For a capacity addition activity or technology improvement to an existing facility that results in increased recycling capacity,²⁴ use one of the following options:
 - a) Baseline recycling is equal to the average annual recycling rate of material type i over the three-year period prior to the start of the project activity;

²⁴ Project activities that increase the total installed recycling capacity of an existing facility prior to or during the project crediting period compared to the baseline are considered capacity additions.

- b) If the facility has been operational for between one and three years, use the average annual recycling rate of material type *i* for the period from the operational start date of the existing facility until the start of the project activity; or
 - c) If the operational period before the capacity addition is less than one year, baseline recycling is capped at the total recycling capacity of the existing facility prior to the capacity addition as given by the manufacturer's specifications. In this case, it shall be assumed that the recycling capacity for each material type *i* is equal to the maximum recycling capacity of the facility for that material type.
- 3) When a project activity is incentivizing and/or facilitating an increase in the collection and/or sorting of plastic waste to enable an increase in its mechanical recycling, use one of the following options:
- a) Baseline recycling is equal to the average annual recycling rate of material type *i* over the three-year period prior to the start of the project activity;
 - b) If the facility has been operational for between one and three years, use the average annual recycling rate of material type *i* for the period from the operational start date of the existing facility until the start of the project activity; or
 - c) If the facility has been operational for less than one year, the baseline recycling rate shall be established in a reasonable and conservative manner (e.g., based on existing sources of plastic waste and projected recycling rates of this plastic waste without the implementation of the project activity) such that it can be validated by the VVB.

Adjustment factor for composite materials containing non-plastic materials

Project activities that recycle composite materials containing both plastic and non-plastic materials that meet Applicability Condition 5 shall only account for the fraction of plastic within the composite material. Such project activities shall apply an adjustment factor, *AF*, to account for the amount of plastic within the composite material. The adjustment factor shall be determined using one of the following options:

- 1) Apply the default factors listed in Table 2 that correspond to the composite materials recycled.

Table 2: Default factors for plastic waste fraction of composite materials

Composite application	Plastic fraction
Composite material (unspecified)	0.04
Used beverage cartons ²⁵	0.20
Paper cups (with polyethylene) ²⁶	0.05
E-waste ²⁷	0.04

- 2) Use sampling to determine the fraction of plastic in the composite material following the most recent version of the CDM's *Standard: Sampling and surveys for CDM project activities and programmes of activities*²⁸ in conjunction with the guidance below:
 - a) Projects shall use 90/10 confidence/precision to establish the reliability of sampling efforts and undertake sampling of composite materials at least every six months. For composite materials with a material composition that does not change over time (e.g., recycling of a certain type of beverage carton), sampling may be done only once at validation or first verification and the same plastic waste fraction can be used for the remainder of the crediting period.
 - b) The sampling method shall be detailed in the monitoring plan and applied using the following guidelines:

²⁵ A conservative default factor was identified using material composition of Tetra Pak beverage cartons from the manufacturer's 2018 and 2020 sustainability reports. Available at:

<https://assets.tetrapak.com/static/documents/sustainability/tetra-pak-sustainability-report-2018.pdf> and <https://assets.tetrapak.com/static/documents/sustainability/sustainability-report2020.pdf>.

²⁶ Default value taken from European Commission (2018). *Life Cycle Inventories of Single Use Plastic Products and their Alternatives*. Available at:

https://ec.europa.eu/environment/enveco/circular_economy/pdf/studies/DG%20ENV%20Single%20Use%20Plastics%20LCA%20181213.pdf.

²⁷ Default value taken from Alassali, A. et al. (2019). Classification of plastic waste originated from waste electric and electronic equipment based on the concentration of antimony. *Journal of Hazardous Materials* 380, 120874. Available at: <https://doi.org/10.1016/j.jhazmat.2019.120874>.

²⁸ Available at: <https://cdm.unfccc.int/Reference/Standards/index.html>.

- i) The plastic fraction shall be calculated as a mean value.
- ii) The sample size shall be determined before starting the sampling process using Equation 18 in “2.1.7 Example 5 – Simple random sampling” in Appendix 1 of the CDM’s *Guideline: Sampling and Surveys for CDM project activities and programmes of activities, version 04.0.*²⁹
- iii) After the sampling process, if the actual sample results do not meet the 90/10 confidence/precision required to establish the reliability of sampling, then a larger sample size may be proposed, updating the expected mean value and variation, and the sampling process may be undertaken again to meet 90/10 confidence/precision.
- iv) Where the project activity recycles more than one type of composite material (e.g., different product or packaging applications, different material combinations), and they are identified separately in the input stream of the recycling process, then sampling for plastic fraction shall be done for each composite material type separately.

The plastic fraction value of each composite material will be multiplied directly by the weight of the composite material type to determine the weight of the plastic (see Equations 2 and 3 in this methodology).

The same adjustment factor shall be applied to both the calculation of baseline recycled plastic waste (in case of capacity addition activities) and the project recycled plastic waste.

²⁹ Available at: <https://cdm.unfccc.int/Reference/Guidclarif/index.html>.

8.2 Project Recycling

Project recycled plastic waste is the amount of plastic waste that is recycled by the project activity.

Project recycled plastic waste is calculated as follows:

$$P_{recycled,y} = \sum_{i=1}^n P_{recycled,i,y} \times AF_i$$

(Equation 3)

Where:

$P_{recycled,y}$ = Total plastic waste recycled by the project activity in year y (tonnes)

$P_{recycled,i,y}$ = Amount of plastic waste of material type i recycled by the project activity in year y (tonnes)

AF_i = Adjustment factor for composite material i (see Adjustment factor under Section 8.1); for non-composite materials, this factor is equal to 1.

8.3 Net Recycled Plastic Waste

The net recycled plastic waste is the amount of plastic waste recycled by the project activity that would not have been recycled without project implementation.

Net recycled plastic waste is calculated as follows:

$$N_{recycled,y} = P_{recycled,y} - B_{recycled,y}$$

(Equation 4)

Where:

$N_{recycled,y}$ = Net recycled plastic waste in year y (tonnes)

9 MONITORING

9.1 Data and Parameters Available at Validation

The baseline plastic waste recycling parameter shall be recorded in the project description and available at the time of validation. For baseline plastic waste recycling, projects that include a new recycling activity shall use Table 3a and projects that include a capacity addition activity shall use Table 3b. Projects that incentivize and/or facilitate an increase in the collection and/or sorting of plastic waste to enable an increase in its mechanical recycling shall use Table 3c.

Table 3a: Baseline recycling parameter (new activity)

Data/Parameter	$B_{recycled,i,y}$
Unit	tonnes/year
Description	Amount of material type i recycled in the baseline in year y
Equation	-
Source of data	-
Justification of choice of data or description of measurement methods and procedures applied	Baseline plastic waste recycling is zero for new project activities (see Section 8.1)
Purpose	Determination of baseline plastic waste recycling for new activities
Comments	-

Table 3b: Baseline recycling parameter (capacity addition activity)

Data/Parameter	$B_{recycled,i,y}$
Unit	tonnes/year
Description	Amount of material type <i>i</i> recycled in the baseline in year <i>y</i>
Equation	Equation 2
Source of data	Based on historical data of recycled material type <i>i</i> or capped at the total recycling capacity of the existing facility (see Section 8.1)
Justification of choice of data or description of measurement methods and procedures applied	<p>One of the following shall be applied:</p> <ul style="list-style-type: none"> a) Average annual recycling rate of material type <i>i</i> over the three-year period prior to the start of the project activity; b) If the facility has been operational for between one and three years, use the average annual recycling rate of material type <i>i</i> over the period from the operational start date of the existing facility until the start of the project activity; or c) If the operational period before the capacity addition is less than one year, baseline recycling is capped at the total recycling capacity of the existing facility prior to the capacity addition, as given by the manufacturer's specifications. In this case, it shall be assumed that the recycling capacity for each material type <i>i</i> is equal to the maximum recycling capacity of the facility for that material type.
Purpose	Determination of baseline plastic waste recycling for capacity addition projects
Comments	-

Table 3c: Baseline recycling parameter (increased mechanical recycling enabled by increased collection and/or sorting)

Data/Parameter	$B_{recycled,i,y}$
Unit	tonnes/year
Description	Amount of material type <i>i</i> recycled in the baseline in year <i>y</i>
Equation	Equation 2
Source of data	Based on historical data of recycled material type <i>i</i> or established in a reasonable and conservative manner (see Section 8.1)
Justification of choice of data or description of measurement methods and procedures applied	<p>One of the following shall be applied:</p> <ul style="list-style-type: none"> a) Average annual recycling rate of material type <i>i</i> over the three-year period prior to the start of the project activity; b) If the facility has been operational for between one and three years, use the average annual recycling rate of material type <i>i</i> over the period from the operational start date of the existing facility until the start of the project activity; or c) If the facility has been operational for less than one year, baseline recycling shall be established in a reasonable and conservative manner such that it can be validated by the VVB.
Purpose	Determination of baseline plastic waste recycling for projects that incentivize and/or facilitate an increase in the collection and/or sorting of plastic waste to enable an increase in its mechanical recycling
Comments	-

9.2 Data and Parameters Monitored

The following parameters shall be monitored and recorded during the crediting period.

Table 4: Project recycling parameter

Data/Parameter	$P_{recycled,i,y}$
Unit	tonnes/year
Description	Amount of plastic waste of type i recycled by the project activity in year y (tonnes)
Equation	Equation 3
Source of data	Direct measurement at project facility
Description of measurement methods and procedures applied	Measurement of each material type i with weighing scales after the final stage at the recycling facility, before leaving the project site or being used for manufacturing products onsite
Frequency of monitoring/recording	Each batch, with at least daily recording
Quality assurance/quality control (QA/QC) procedures applied	Scales shall be calibrated according to the equipment manufacturer's specifications or at least every three years. Amount of plastic recycled shall be cross-checked with sales receipts of material sold to final buyer or other equivalent third-party evidence.
Purpose	Calculation of baseline recycled plastic waste Calculation of project recycled plastic waste
Comments	If plastic is washed, it should be weighed after it has been dried. Only material types for which recycling activities are determined to be additional at validation are included for crediting.

Table 5: Adjustment factor for composite materials containing non-plastic materials

Data/Parameter	AF_i
Unit	-
Description	Adjustment factor for composite material i
Equation	Equations 2 and 3
Source of data	<p>One of the following:</p> <ul style="list-style-type: none"> a) Apply the default factors listed in Table 2 that correspond to the composite materials recycled; or b) Use sampling to determine the fraction of plastic in the composite material following the most recent version of the CDM's <i>Standard: Sampling and surveys for CDM project activities and programmes of activities</i>³⁰ (see Adjustment factor under Section 8.1 of this methodology).
Description of measurement methods and procedures applied	<p>One of the following:</p> <ul style="list-style-type: none"> a) Apply the default factors listed in Table 2 that correspond to the composite materials recycled; or b) Apply the sampling method using the guidelines in Section 8.1.
Frequency of monitoring/recording	<p>For projects applying the default factors listed in Table 2, this is not applicable.</p> <p>Projects using 90/10 confidence/precision to establish the reliability of sampling efforts shall undertake sampling of composite materials at least every 6 months. For composite materials with a material composition that does not change over time (e.g., recycling of a certain type of beverage carton), sampling may be done only once at validation or first verification and the same plastic waste fraction can be used for the remaining crediting period.</p>
Quality assurance/quality control (QA/QC) procedures applied	-
Purpose	Calculation of baseline recycled plastic waste

³⁰ Available at: <https://cdm.unfccc.int/Reference/Standards/index.html>.

	Calculation of project recycled plastic waste
Comments	-

Table 6: End destination of non-recycled plastic waste

Data/Parameter	End destination of non-recycled plastic waste
Unit	-
Description	End destination of plastic waste that enters the project recycling facility and is not recycled or is lost during the recycling process
Equation	-
Source of data	Third-party evidence (e.g., receipts)
Description of measurement methods and procedures applied	-
Frequency of monitoring/recording	Yearly proof required, or where the end destination changes
Quality assurance/quality control (QA/QC) procedures applied	-
Purpose	Monitoring of compliance with Applicability Condition 7 in Section 4
Comments	-

9.3 Description of Monitoring Plan

The project proponent shall establish and apply quality management procedures to manage data and information. Written procedures (e.g., standard operating procedures, SOPs) shall be established for each measurement task, outlining responsibility, timing and record location requirements. The greater the rigor of the management system for the data, the easier it will be to conduct an audit for the project.

Record-keeping practices shall include the following procedures:

- During the crediting period, all parameters listed in Section 9.2 shall be monitored and recorded.
- The amount of each material type recycled by the project shall be measured with weighing scales before being dispatched to the next stage and before being used for any manufacture of products within the recycling facility. The amount of plastic waste recycled shall be cross-checked by:
 - Comparison against the maximum recycling capacity of the facility; and
 - Sales receipts to final buyer or other equivalent third-party evidence.

In case of inconsistencies, a conservative approach to correction shall be taken.

- The project proponent shall establish, maintain and apply a monitoring plan and information system that includes criteria and procedures for obtaining, recording, compiling and analyzing the data, parameters and other information important for quantifying and reporting the amount of recycled plastic waste in the project and baseline scenarios.
- Monitoring procedures shall address the following:
 - Data and information to be reported;
 - Data units;
 - Data sources;
 - Monitoring methods (e.g., estimation, modeling, measurement and calculation);
 - Monitoring equipment;
 - Monitoring frequencies;
 - QA/QC procedures; and
 - Data management system, including the location, backup, and retention of stored data.

- Monitoring and weighing equipment shall be maintained and calibrated according to current good practice (e.g., relevant industry standards or manufacturer specifications) or at least every three years.
- Monitoring personnel shall be trained to ensure that monitoring requirements are carried out in accordance with the monitoring plan.
- Monitoring roles and responsibilities shall be clearly defined in the project description, and training requirements addressed.
- All data collected as part of monitoring shall be archived electronically and stored in a secure and retrievable manner for at least two years after the end of the project crediting period.
- QA/QC procedures shall be applied to increase confidence that all measurements and calculations have been made correctly. These include, but are not limited to:
 - Data gathering, input and handling measures;
 - Checking input data for typical errors, including inconsistent physical units and unit conversion errors;
 - Detecting typographical errors caused by data transcription from one document to another, and missing data for specific time periods or physical units;
 - Checking input time series data for large unexpected variations (e.g., orders of magnitude) that could indicate input errors;
 - Use of version control for all electronic files to ensure consistency;
 - Physical protection of monitoring equipment (e.g., sealed meters and data loggers);
 - Physical protection of records of monitored data (e.g., hard copy and electronic records);
 - Checking and documenting input data units; and
 - Documentation of all sources of data and assumptions.