

Approved VCS Methodology
VM0014

Version 1.0
Sectoral Scopes 1, 10

Interception and Destruction of
Fugitive Methane from Coal Bed
Methane (CBM) Seeps

Scope

This methodology applies to projects that capture and destroy fugitive methane emissions occurring at coal bed outcroppings near active coal bed methane production operations.

Methodology Developers

The methodology element was developed by the Southern Ute Indian Tribe - Growth Fund and WSP Environment & Energy. Det Norske Veritas and Bureau Veritas provided methodology validation support through the VCS Double Approval Process.

Authors

Mike Huisenga (WSP) and Kyle Siesser (SUIT)



TABLE OF CONTENTS

| | | |
|------|---|----|
| I. | SOURCE, DEFINITIONS AND APPLICABILITY | 4 |
| | Sources | 4 |
| | Definitions..... | 5 |
| | Applicability conditions..... | 6 |
| II. | BASELINE METHODOLOGY PROCEDURE | 7 |
| | Project boundary | 7 |
| | Identification of the baseline scenario | 11 |
| | Additionality | 12 |
| | Baseline emissions | 12 |
| | Project emissions | 18 |
| | Leakage | 21 |
| | Emission Reductions..... | 21 |
| III. | MONITORING METHODOLOGY | 21 |
| | Data and parameters not monitored | 21 |
| | Data and parameters monitored | 24 |

I. SOURCE, DEFINITIONS AND APPLICABILITY

Sources

This baseline and monitoring methodology is based on the following approved baseline and monitoring methodologies:

ACM0008 V7 “*Consolidated methodology for coal bed methane, coal mine methane and ventilation air methane capture and use for power (electrical or motive) and heat and/or destruction through flaring or flameless oxidation*”

- This consolidated methodology applies to active coal mines where methane mitigation projects are implemented to reduce emissions of methane during pre-mine drainage, post mine drainage and from ventilation air methane. Captured methane can be flared, used to generate heat and / or power and delivered to gas grids for heat and / or power use or in vehicles. ACM0008 has been approved as a baseline and monitoring methodology by the CDM Executive Board for use in registered Clean Development Mechanism (CDM) projects and which is recognized by the VCS.
- This baseline and monitoring methodology is similar to AMC0008 in that the sources of project emissions are nearly identical, because the potential uses for recovered methane are the same. However, the baseline emissions of methane from a CBM gas seep result from different physical causes than CMM emissions. ACM0008 applies to projects located at coal mines where the emissions are a result of mining operations while this methodology applies to projects located at CBM gas extraction operations where coal mining is not occurring. Furthermore, ACM0008 defines CBM as gas drainage which precedes the mining of a coal seam. This can be done to sell gas, but is mainly done to degasify the seam and make it safe for mining. The type of CBM production covered in this methodology strictly pertains to gas extraction from coal seams which aren't being mined. Fugitive methane emissions mitigated by projects covered by this methodology are a result of disturbing the equilibrium in the seam during gas extraction.

AM0009 V4 “*Recovery and utilization of gas from oil wells that would otherwise be flared or vented*”

- This methodology applies to the capture and destruction of associated gas recovered during oil production. This gas is typically vented rather than put to beneficial use. Under the methodology proponents can generate power, compress and transport gas to processing facilities for upgrading.
- AM0009 is similar to this methodology in that it applies to the capture and destruction of methane which is produced as an undesirable by-product of the primary production of oil (or gas). A key difference between these methodologies and project types is that oil production operations utilizing AM0009 typically have the opportunity to recover methane at the well head; where methane recovered from CBM seeps require the use of additional capital equipment to intercept and aggregate methane from coal seam outcroppings.

This methodology also refers to the latest versions of the following CDM Executive Board approved tools:

- “Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion”;
- “Tool to calculate project emissions from electricity consumption”;
- “Combined tool to identify the baseline scenario and demonstrate additionality”;
- “Tool to determine project emissions from flaring gases containing methane”;
- “Tool to determine the emission factor for an electricity system”.

Definitions

For the purpose of this methodology, the following definitions apply:

- **Coal Bed Methane (CBM).** Coal bed methane is the methane gas that resides inside underground coal seams, under pressure, and thus adsorbed to the coal.
- **Coal Bed Methane Production (CBM Production).** Coal bed methane production refers to the extraction of methane from underground coal seams, the subsequent treatment and injection of the gas into natural gas grids for utilization by end users. CBM extraction involves the removal of water or gas from the coal seam decreasing the hydrostatic pressure in order to cause methane to desorb from coal allowing for its removal. For the purposes of this methodology, the act of removing water from coal seams to produce methane constitutes a coal bed methane project.
- **“Up-dip”.** The up-dip areas of the coal seam refer to the ground level elevations where coal outcroppings and methane gas seeps exist. Coal bed methane flows from down-dip to up-dip within the coal seam until it reaches the outcropping where it is released to the atmosphere as fugitive emissions.
- **“Down-dip”.** The down-dip areas of the coal seam refer to the location where coal bed methane extraction typically takes place. Down-dip can be considered to be in the coal seam at 1000 to 4000 feet below the surface where high pressures readily allow for the removal of methane.
- **Produced water.** Water which is pumped and removed from a coal seam in order to liberate methane from the coal.
- **Coal bed methane seep.** Ground level fugitive methane emissions from coal seam outcroppings which originate from coal beds deep underground.
- **Gas interception system.** A system consisting of vertical or horizontal gas wells or gas collection membranes, vacuum compressors and gas transmission pipelines designed to intercept and recover gas in coal seams or at the ground surface prior to its release at coal outcroppings.
- **Fugitive methane.** Methane which is emitted to the atmosphere from underground coal seams and results partly from down dip coal bed methane production operations.

- **Monitoring Wells.** Wells which have been drilled into a coal seam to monitor water levels or other environmental conditions in the context of coal, oil or gas resource assessments. These wells may be repurposed and used as gas interception wells


Applicability conditions

This methodology applies to project activities that capture and destroy methane which would otherwise be released to the atmosphere from coal bed outcroppings. Projects using this methodology will be implemented on coal seams or where exposed coal bed outcroppings exist having documented coal bed methane seeps. The methodology does not apply to methane captured at CBM extraction operations, but will apply to mitigation projects located between coal seam outcroppings and CBM operations.

The methodology applies to project activities that involve the use of any of the following extraction techniques:

- The use of gas drainage wells and monitoring wells, serving as gas interception wells, drilled near locations where methane gas seeps are present. Gas interception wells must be located between documented methane gas seeps at coal seam outcroppings and down dip traditional CBM wells. In other words, traditional CBM wells themselves cannot qualify as interception wells.
- The use of a gas membranes, surface covers or underground horizontal well fields to capture fugitive methane emissions at or just below the ground surface level.

Figure 1: Illustration showing that eligible interception system must be placed between CBM operations and or at locations of observed CBM gas seeps.

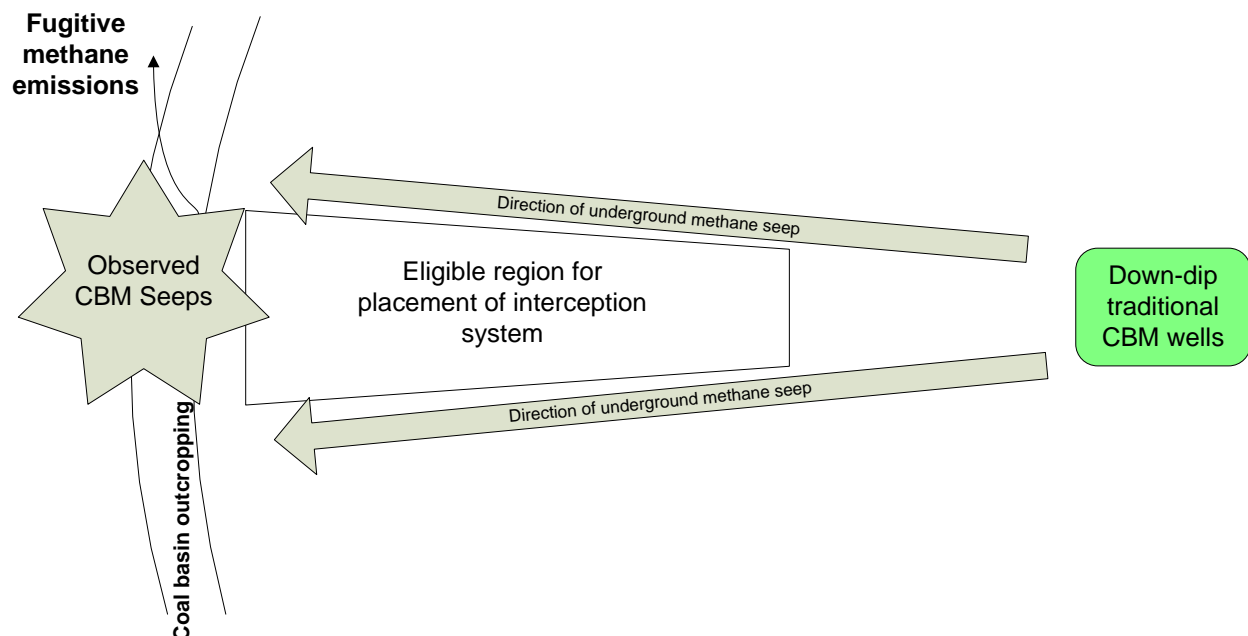

This methodology applies to fugitive methane capture project activities at or near known locations of methane gas seeps as well as the on-site or off-site utilization and destruction of captured methane. The baseline is the partial or total atmospheric release of the methane and the project activities include the following gas destruction scenarios:

- Captured methane is destroyed through flaring; and/or
- Captured methane is destroyed through utilization on-site to produce electricity, and/or thermal energy; and/or
- Captured methane is destroyed off-site through utilization by end users following injection into natural gas distribution grids.

This methodology **does not apply** to the following project activities:

- Methane captured at active traditional CBM extraction wells;
- Methane captured at active or abandoned coal mines;
- Degasification of methane from coal seams prior to coal mining activities.
- Injection of any fluid/gas “down-dip” of the location of methane interception in order to enhance methane capture;
- Removal of water from coal seams where gas interception systems are constructed in order to enhance gas recovery. If suitable and eligible wells which lie on the path from down-dip traditional CBM wells to up-dip exposed outcroppings and having documented methane gas seeps are flooded, they may be dewatered in order to be operated as interception wells.

II. BASELINE METHODOLOGY PROCEDURE

Project boundary

For the purpose of determining **project activity emissions**, project participants shall include:

- CO₂ emissions from the combustion of methane in a flare, engine, power plant, or heat generation plant;
- CO₂ emissions from the combustion of non-methane hydrocarbons (NMHCs), if they represent more than 1% by volume of the extracted coal mine gas;
- CO₂ emissions from on-site fuel consumption due to the project activity, including transport of the fuel
- Fugitive methane emissions from on-site gas processing equipment
- Fugitive emissions from unburned methane and from gas treatment equipment


For the purpose of determining **baseline emissions**, project participants shall include the following emission sources:

- Fugitive CH₄ emissions from coal bed methane seeps;
- CO₂ emissions from the destruction of methane in the baseline scenario;
- CO₂ emissions from the production of heat and power (motive and electrical) that is replaced by the project activity.

The **spatial extent** of the project boundary encompasses:

- All equipment installed and used as part of the project activity for the extraction, compression, storage, and treatment of intercepted fugitive methane at the project site, and transport to an off-site user, including transport through natural gas distribution grids. Certain project equipment may be common between methane emissions mitigation projects and co-located CBM operations such as gas compression and treatment systems and in which case fugitive emission should be allocated appropriately
- Flaring, captive power and/or heat generation facilities installed and used as part of the project activity.
- Power plants connected to the electricity grid, where the project activity exports power to the grid, as per the definition of the project electricity system and connected electricity system given in “Tool to calculate the emission factor for an electricity system.”
- Combustion of methane by end users connected to natural gas grids into which gas has been injected.

Figure 2: Hypothetical project schematic showing a gas interception system consisting of 9 vertical wellheads connected to three compression and metering systems to deliver raw gas to a common pipeline booster compressor station and gas treatment plant shared by an existing CBM operation

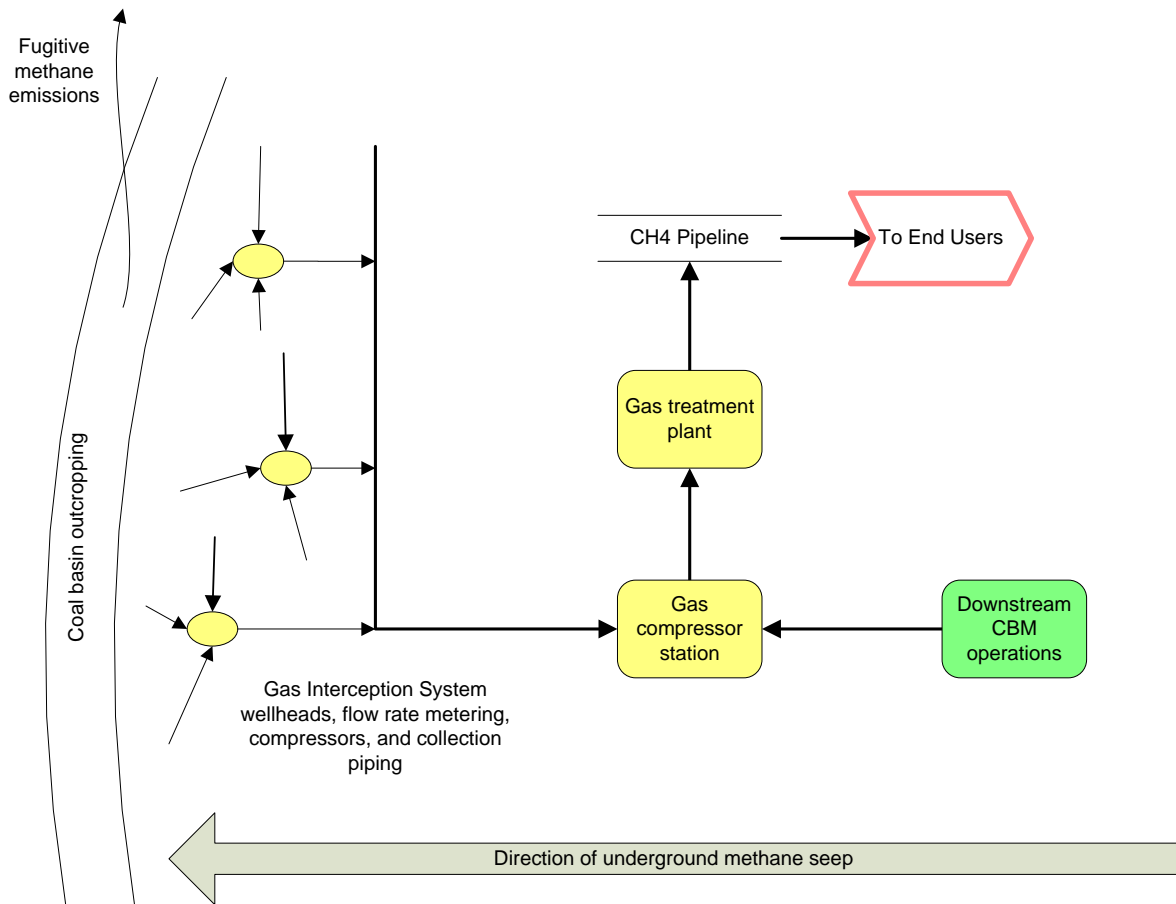

The greenhouse gases included in or excluded from the project boundary are shown in

Table 1.

Table 1: Emissions sources included in or excluded from the project boundary

| Source | Gas | Included? | Justification / Explanation |
|--|-----|-----------|--|
| Baseline Emissions of methane from surface gas seeps at coal outcroppings | CO2 | No | Excluded for simplification. This is conservative. |
| | CH4 | Yes | This is the main source of emissions. The amount included in the baseline is the volume of methane captured by gas interception systems. This is not a total inventory of all methane seepage in the project's spatial boundary. |
| | N2O | No | Excluded for simplification. This is conservative. |

| Source | | Gas | Included? | Justification / Explanation |
|----------------------------|---|-----|--|--|
| | Grid electricity generation (electricity provided to the grid) | CO2 | Yes | Only CO2 emissions associated with the quantity of electricity exported to the grid which replaces marginal sources of electricity generation in the baseline will be counted; use of combined margin method as described in “Tool to calculate the emission factor for an electricity system” should be made. |
| | | CH4 | No | Excluded for simplification. This is conservative. |
| | | N2O | No | Excluded for simplification. This is conservative. |
| | Captive power and/or heat and injection into gas grids | CO2 | Yes | Only when the baseline scenario involves such usage. |
| | | CH4 | No | Excluded for simplification. This is conservative. |
| | | N2O | No | Excluded for simplification. This is conservative. |
| Project | On-site fuel and electricity consumption due to the project activity required to transport, compress, clean and upgrade the gas | CO2 | Yes | Energy consumption from equipment required for compressing, cleaning, upgrading and transporting gas will be accounted for. Energy use allocations will be made in cases where production facilities are shared between multiple operations. |
| | | CH4 | No | Excluded for simplification. This emission source is assumed to be very small. |
| | | N2O | No | Excluded for simplification. This emission source is assumed to be very small. |
| | Emissions from methane destruction | CO2 | Yes | From the combustion of methane in a flare, flameless oxidation, or heat/power generation. |
| | Emissions from NMHC destruction | CO2 | Yes | From the combustion of NMHC in a flare of flameless oxidizer or heat/power generation, if NMHC accounts for more than 1% by volume of extracted gas. |
| | Fugitive emissions of un-combusted methane | CH4 | Yes | Small amounts of methane will remain unburned in flares. |
| | Fugitive methane emissions from on-site gas processing equipment | CH4 | Yes | If gas sales are metered upstream of a processing facility, then fugitive emissions are to be accounted for. If gas sales are metered downstream of a processing facility, then this source is not included. |
| | Fugitive methane emissions from gas supply pipeline | CH4 | No | Excluded for simplification. This emission source is assumed to be very small. |
| Accidental methane release | CH4 | No | Excluded for simplification. This emission source is assumed to be very small. | |
| | | | | |

Identification of the baseline scenario

Project participants should refer to the latest version of the “Combined tool to identify the baseline scenario and demonstrate additionality”, and follow the specific guidance outlined below for step 1.

Step 1: Identify technically feasible options for capturing and/or utilizing fugitive CBM

Step 1: Options for gathering fugitive CBM

The baseline scenario alternatives should include all possible options that are technically feasible to collect CBM gas that would be emitted as fugitive methane and which comply with safety regulations. These options should include:

- A. The use of vertical gas wells and collection systems drilled into the coal seam down dip of the location of known CBM gas seeps;
- B. The use of surface membranes or covers or subsurface horizontal gas wells and collection systems;
- C. Possible combinations of options A and B with relative shares of gas specified.

These options should include the VCS project activity not implemented as a VCS project.

Step 1b: Options for captured CBM gas treatment

- A. Venting
- B. Flaring of CBM
- C. Use for grid power generation
- D. Use for captive power generation
- E. Use for heat generation
- F. Feed into gas pipeline to be used as fuel for vehicles or heat/power generation
- G. Possible combinations of options A to F with the relative shares of gas treated under each option specified

Step 1c: Options for energy production

The baseline scenario alternatives should include all possible options to generate electricity (grid, captive power generation using CBM or other fuels) and/or heat (using CBM or other fuels) and/or to fuel vehicles.

These options should include the proposed project activity that has however not been implemented as a VCS project activity.

Refer to “Combined tool to identify the baseline scenario and demonstrate additionality” v2.2 and complete step 2 to step 5.

Additionality

The additionality of the project activity shall be demonstrated and assessed using the latest version of the Clean Development Mechanism tool called “Combined tool to identify the baseline scenario and demonstrate additionality”.

Baseline emissions

Baseline emissions included in this methodology are:

- CO₂ emissions resulting from the destruction of methane by flares and combustion in heat and / or power generation equipment
- CH₄ from free flowing gas seeps at locations where exposed coal outcroppings exist
- CO₂ emissions from the generation of heat and / or power replaced by the project activity using recovered methane

Baseline emissions are calculated as follows:

$$\mathbf{BE}_y = \mathbf{BE}_{MD,y} + \mathbf{BE}_{MR,y} + \mathbf{BE}_{USE,y} \quad (1)$$

Where:

- BE_y = Baseline emissions in year y (t CO₂e/yr)
 $BE_{MD,y}$ = Baseline emissions from destruction of methane in the baseline scenario in year y (t CO₂e/yr)
 $BE_{MR,y}$ = Baseline emissions from release of methane into the atmosphere in year y that is avoided by the project activity (t CO₂e/yr)
 $BE_{USE,y}$ = Baseline emissions from the production of power, heat or supply to the gas grid replaced by the project activity in year y (t CO₂e/yr)

Methane destruction in the baseline

Depending on the project type, methane destruction may already be occurring in the baseline in flares, flameless oxidation units or for the production of heat and/or power.

$$\mathbf{BE}_{MD} = (\mathbf{CEF}_{CH_4} + r \times \mathbf{CEF}_{NMHC}) \times \sum_i \mathbf{CM}_{BL,i} \quad (2)$$

With:

$$r = \mathbf{PC}_{NMHC} / \mathbf{PC}_{CH_4} \quad (3)$$

Where:

- $BE_{MD,y}$ = Baseline emissions from destruction of methane in the baseline scenario in year y (t CO₂e/yr)
 CEF_{CH_4} = Carbon emission factor for combusted methane (2.75 t CO₂/ t CH₄)
 CEF_{NMHC} = Carbon emission factor for combusted non-methane hydrocarbons. This parameter should be obtained through periodical analysis of captured methane (t CO₂/ t NMHC)
 $CM_{BL,i}$ = Captured methane that is destroyed by use i in the baseline (t CH₄)
 r = Relative proportion of NMHC compared to methane

PC_{CH_4} = Concentration (in mass) of methane in extracted gas (%), measured on wet basis
 PC_{NMHC} = NMHC concentration (in mass) in extracted gas (%) measured on wet basis

Methane released into the atmosphere


Fugitive methane emissions generated at down-dip traditional coal bed methane operations are freely flowing gases which migrate up-dip and are emitted at coal seam outcroppings at the ground surface. Intercepted fugitive coal bed methane is not gas that is stored in an underground reservoir or adsorbed in the coal seam below the wells. Because the gas captured by these interception systems is freely flowing up the coal seam, the effect of applying vacuum pressure to the wellhead will increase the volume of free flowing gas that can be evacuated by each well, thus increasing the methane interception rate and decreasing fugitive emissions at the outcropping. Since vacuum pumps do not act to liberate adsorbed methane or drain underground gas reservoirs, but rather act to increase the area of drainage for each interception well, all of the methane captured during a given monitoring period can be said to have been emitted at the outcropping in the absence of the project activity during the same monitoring period. Furthermore, it is true that because these wellheads do not desorb methane from coal or drain gas from reservoirs, they are only capturing up-dip migrating methane that would very soon be released to the atmosphere. In the absence of a methane interception system, this gas would be emitted to the atmosphere at coal seam outcroppings at the ground surface level.

For the reasons discussed above, baseline emissions of methane for each monitoring period are determined using the volume of captured methane from the interception well system. Project proponents are required to submit documented evidence that coal bed methane gas seeps are present up-dip of where gas interception systems are placed.

This evidence may take either of the following forms:


- Aerial LIDAR mappings showing the coal outcropping, the location of the proposed gas interception system and ground level methane concentration at the outcropping
- Field surveys of the coal seam outcropping located up-dip of the interception systems using a methane flux chamber to establish ground level methane flux in $\text{mol/m}^2\text{-day}$

Figure 3: Cross section showing how gas interception system wells can be placed between CBM operations and the coal outcroppings where fugitive emissions occur in order to capture methane before it reaches the surface. Fugitive methane emitted at the surface can originate both from within the seam above the ground water level as well as from the main part of the CBM field below the ground water level

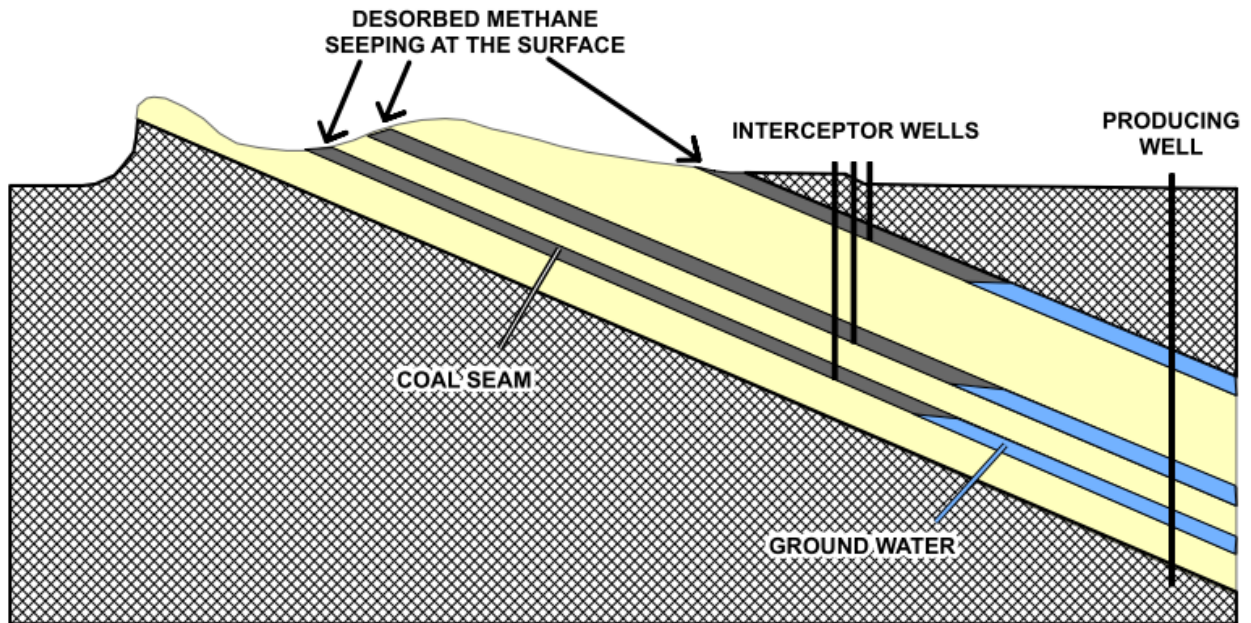


The interception system will only capture a portion of the fugitive methane emitted at the outcroppings ($X \text{ CH}_4$), as illustrated by Figure 4. The volume of gas captured by the system will be considered the baseline emissions ($Y \text{ CH}_4$) and fugitive methane eluding capture ($X - Y \text{ CH}_4$) is excluded from the project boundary, since this would be emitted in both the baseline and project cases. The figure also shows how methane flows from down-dip to up-dip before being emitted at the outcroppings. The down-dip traditional CBM extraction wells are excluded from the project boundary. Traditional CBM extraction wells and systems are ineligible as these systems act to free adsorbed methane from the coal seam and do not prevent fugitive methane emissions.

Figure 4: Schematic illustrating the change in fugitive emissions at the coal seam outcropping resulting from methane capture by the gas interception systems, in this case, vertical wells.

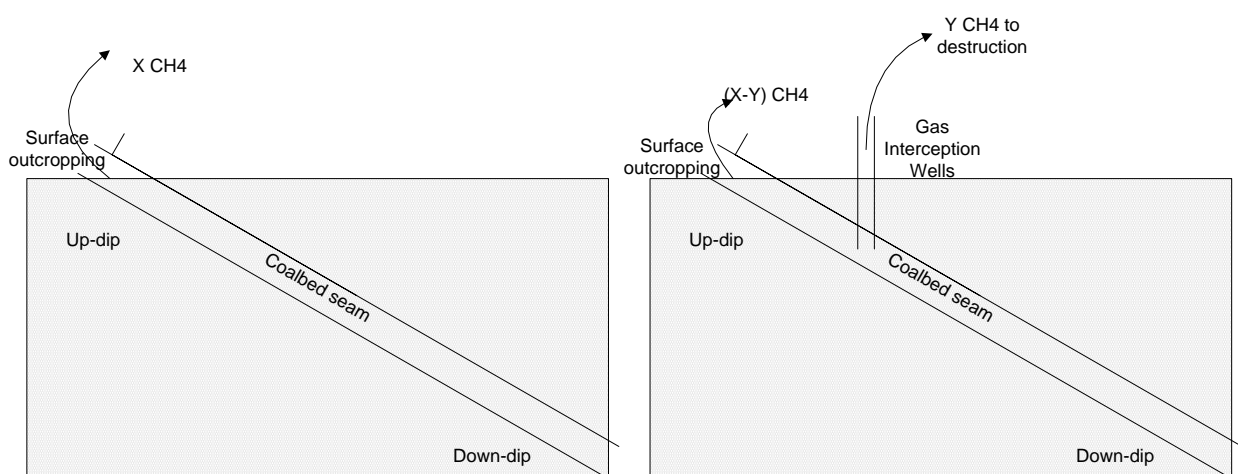

CBM interception wells or surface membranes will intercept and capture methane flowing up the coal seam to the outcropping or capture membrane at the outcropping in the absence of an imparted vacuum. However, the use of vacuum pumps will aid these wells by increasing their drainage area in the seam. Interception wells spaced laterally across the upward sloping coal seam will ideally capture methane flowing across the lateral line. This is illustrated in Figure 5.

Figure 5: Schematic, on the left, showing vertical gas interception wells placed in the flow of fugitive migrating CBM gas intercepting some of the gas. On the right, vacuum pressure is applied to the wells and increases each well's ability to drain gas horizontally across the seam, effectively allowing it to capture a larger share of the fugitive methane.

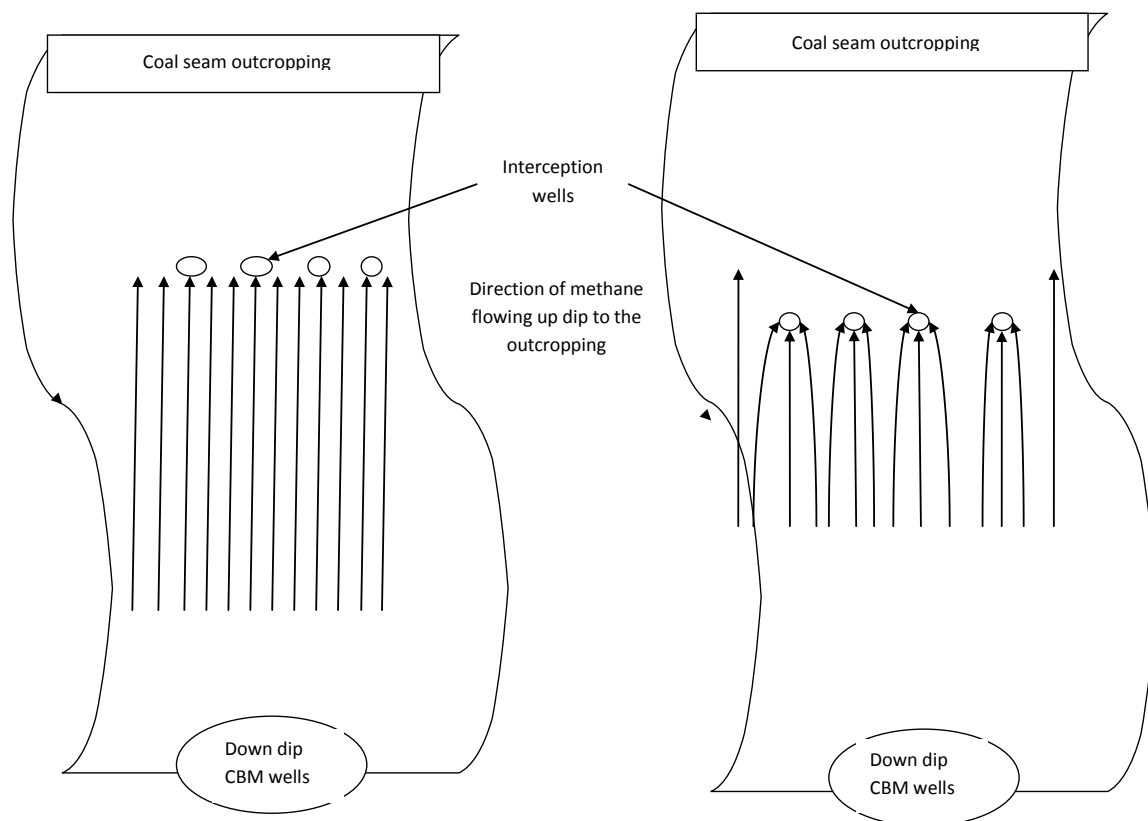

Baseline emissions from methane release to the atmosphere are calculated by subtracting methane which is captured and used in the baseline scenario from the methane which is captured and used by the project activity for each use.

$$BE_{MR} = GWP_{CH_4} * \sum_i (CM_{PJ,i,y} - CM_{BL,i,y}) \quad (4)$$

Where:

- BE_{MR} = Baseline emissions from release of methane into the atmosphere that is avoided by the project activity (t CO₂e)
 $CM_{PJ,i,y}$ = Captured methane that is destroyed by use *i* of the project activity in year *y* (tCH₄)
 $CM_{BL,i}$ = Captured methane that would have been destroyed by use *i* in the baseline scenario in year *y* (t CH₄)

Emissions from power/heat generation replaced by project

$$BE_{USE} = GEN \times EF_{ELEC} + HEAT \times EF_{HEAT} + GAS \times EF_{GAS} \quad (5)$$

Where:

- BE_{USE} = Baseline emissions from the production of power and / or heat or from destruction following injection into gas grids replaced by the project activity (t CO₂e/yr)
 GEN = Electricity generated by project activity (MWh)
 EF_{ELEC} = Emission factor of electricity (grid, captive or a combination) replaced by project (t CO₂/MWh)
 $HEAT$ = Heat generated by project activity (GJ)
 EF_{HEAT} = Emission factor of heat production replaced by project activity (t CO₂/GJ)
 GAS = Gas delivered to the gas grid (GJ)
 EF_{GAS} = Emission factor for gas grid fuel replaced by the project activity (t CO₂/GJ)

Grid power emission factor

If the baseline scenario includes grid power supply that would be replaced by the project activity, the combined margin emission factor for replaced electricity shall be calculated using the “Tool to calculate the emission factor for an electricity system”. However, projects based in the United States can choose to use emission factors corresponding to the applicable grid sub-region in the most recent version of the EPA’s eGRID database.

Captive power emissions factor

If the baseline scenario includes captive power generation (either existing or new) that would be replaced by the project activity, the Emissions Factor for replaced electricity is calculated as follows:

$$EF_{captive} = \frac{EF_{CO_2,i}}{Eff_{captive}} \times \frac{44}{12} \times \frac{3.6TJ}{1000MWh} \quad (6)$$

Where:

- $EF_{captive}$ = Emission factor for captive power generation (t CO₂e/MWh)
 $EF_{CO_2,i}$ = CO₂ emission factor of fuel used in captive power generation (tC/TJ)
 $Eff_{captive}$ = Efficiency of the captive power generation (%)
 $44/12$ = Carbon to Carbon Dioxide conversion factor
 $3.6/1000$ = TJ to MWh conversion factor

Combination of grid power and captive power emissions factor

If the baseline scenario selection determines that both captive and grid power would be used, then the emission factor for the baseline is the weighted average of the emissions factor for grid power and captive power.

$$EF_{ELEC} = S_{grid} \times EF_{grid} + S_{captive} \times EF_{captive} \quad (7)$$

Where:

- EF_{ELEC} = CO₂ baseline emission factor for the electricity replaced due to the project activity (t CO₂/MWh)
 EF_{grid} = CO₂ baseline emission factor for the grid electricity replaced due to the project activity (t CO₂/MWh)
 $EF_{captive}$ = CO₂ baseline emission factor for the captive electricity replaced due to the project activity (t CO₂/MWh)
 S_{grid} = Share of facility electricity demand supplied by grid imports over the last 3 years (%)¹
 $S_{captive}$ = Share of facility electricity demand supplied by captive power over the last 3 years (%)¹

Heat generation emissions factor

If the baseline scenario includes heat generation (either existing or new) that is replaced by the project activity, the Emissions Factor for replaced heat generation is calculated as follows:

$$EF_{HEAT} = \frac{EF_{CO_2,i}}{Eff_{heat}} \times \frac{44}{12} \times \frac{1TJ}{1000GJ} \quad (8)$$

Where:

- EF_{HEAT} = Emission factor for heat generation (t CO₂/GJ)
 $EF_{CO_2,i}$ = CO₂ emission factor of fuel used in heat generation (t C/TJ)
 Eff_{heat} = Boiler efficiency of the heat generation (%)
 $44/12$ = Carbon to Carbon Dioxide conversion factor
 $1/1000$ = TJ to GJ conversion factor

To estimate the boiler efficiency, project proponents may choose between the following two options:

Option A:

Use the highest value among the following three values as a conservative approach:

- (a) Measured efficiency prior to project implementation
- (b) Measured efficiency during monitoring
- (c) Manufacturer nameplate data for efficiency of the existing boilers

¹ If the facility is a new facility, then the share of grid versus import power determined to be the most likely baseline scenario should be used.

Option B:

Assume a boiler efficiency of 100% based on the net calorific values as a conservative approach.

Gas grid emission factor

The emission factor occurring in the baseline from the use of gas grid fuel replaced by the project activity is calculated as follows:

$$EF_{GAS} = EF_{CO2,i} \times \frac{1}{Eff_{processing}} \times \frac{44}{12} \times \frac{1TJ}{1000GJ} \quad (9)$$

Where:

- EF_{GAS} = Emission factor for gas grid fuel replaced by the project activity (t CO₂/GJ)
 $EF_{CO2,i}$ = CO₂ emission factor for displaced gas grid fuel (t C/TJ)
 $Eff_{processing}$ = The efficiency of gas processing facilities used to treat captured methane onsite prior to injection into gas grids (%)²
 44/12 = Carbon to Carbon Dioxide conversion factor
 1/1000 = TJ to GJ conversion factor

Project emissions

Project emissions included in this methodology are:

- CO₂ emissions due to consumption of fossil fuels and electricity for the recovery, compression, and transportation of the raw gas stream;
- CO₂ emissions from the destruction of methane and non-methane hydrocarbons by flares, by heat and / or power generation equipment ;
- CH₄ emissions from incomplete combustion of raw gas by flares

Project emissions are calculated as follows:

$$PE_y = PE_{ME,y} + PE_{MD,y} + PE_{UM,y} \quad (10)$$

Where:

- PE_y = Project emissions in year y (t CO₂e/yr)
 $PE_{ME,y}$ = Project emissions from energy use to capture and use methane in year y (t CO₂e/yr)
 $PE_{MD,y}$ = Project emissions from methane destroyed in year y (t CO₂e/yr)
 $PE_{UM,y}$ = Project emissions from un-combusted methane in year y (t CO₂e/yr)

² This efficiency refers to the combined efficiency of upgrading and injection into gas grids where resulting losses are fugitive emissions, gas flared and / or used for heat and power onsite. If gas delivered to gas grids is metered after the processing facility, then $Eff_{processing}$ is equal to 1. When gas sales to grid are metered before processing, $Eff_{processing}$ should reflect the fugitive emissions by the processing facility used.

Combustion emissions from additional energy required for methane capture and use

Additional energy may be used for the capture, compression, clean-up, and use or destruction of methane. Emissions from this energy use should be included as project emissions.

$$PE_{ME} = CONS_{ELEC,PJ} \times CEF_{ELEC} + CONS_{HEAT,PJ} \times CEF_{HEAT} + CONS_{FossFuelPJ} \times CEF_{FossFuel} \quad (11)$$

Where:

| | | |
|----------------------|---|---|
| PE_{ME} | = | Project emissions from energy use to capture and use or destroy methane (t CO ₂ /yr) |
| $CONS_{ELEC,PJ}$ | = | Additional electricity consumption for capture and use or destruction of methane, if any (MWh) ³ |
| CEF_{ELEC} | = | Carbon emissions factor of electricity used by the process equipment (t CO ₂ /MWh) |
| $CONS_{HEAT,PJ}$ | = | Additional heat consumption for capture and use or destruction of methane, if any (GJ) |
| CEF_{HEAT} | = | Carbon emissions factor of heat used by the process equipment (t CO ₂ /GJ) |
| $CONS_{FossFuel,PJ}$ | = | Additional fossil fuel consumption for capture and use or destruction of methane, if any (GJ) |
| $CEF_{FossFuel}$ | = | Carbon emissions factor of fossil fuel used by the process equipment (t CO ₂ /GJ) |

For electricity emissions factor, the same formulae are used as in the calculations of baseline emissions. In other words, if the source of power for the process equipment is the grid, then the formulae from “Tool to calculate the emission factor for an electricity system” for calculating the combined margin emissions factor are used. If the source of power for the process equipment is captive power generation, then the emissions factor is calculated based on the emission factor for the fuel used and efficiency of the captive power plant.

For the heat generation emission factor, the same formulae are used as in the calculations of baseline emissions. In other words, the boiler efficiency and the emission factor for the fuel used are the basis of the emissions factor.

Combustion emissions from use of captured methane

When the captured methane is burned in a flare, heat or power plant, mechanical power generation equipment, or oxidized in a flameless oxidation unit, combustion emissions are released. In addition, if NMHC account for more than 1% by volume of the extracted raw gas, combustion emissions from these gases should also be included. Captured methane delivered to heat and / or power generation is equal to the methane destroyed by these end uses since IPCC 2006 assumes complete combustion in these end uses.

$$PE_{MD} = (MD_{FL} + CM_{ELEC} + CM_{MECH} + CM_{HEAT} + CM_{GAS}) \times (CEF_{CH_4} + r \times CEF_{NMHC}) \quad (12)$$

With:

$$r = PC_{NMHC} / PC_{CH_4} \quad (13)$$

Where:⁴

| | | |
|-----------|---|--|
| PE_{MD} | = | Project emissions from destruction of captured methane (t CO ₂ /yr) |
| MD_{FL} | = | Methane destroyed through flaring (t CH ₄) |

³ For example, electricity may be required to run pumps, motors, compressors, and gas clean-up equipment

⁴ Note that throughout this baseline methodology, it is assumed that measured quantities of raw gas are converted to tones of methane using the measured concentration of the extracted raw gas and the density of methane.

| | |
|--------------|---|
| CM_{ELEC} | = Captured methane destroyed through electrical power generation (t CH ₄) |
| CM_{MECH} | = Captured methane destroyed through mechanical power generation (tCH ₄) |
| CM_{HEAT} | = Captured methane destroyed through heat generation (t CH ₄) |
| CM_{GAS} | = Captured methane destroyed after being supplied to natural gas grid (t CH ₄) |
| CEF_{CH_4} | = Carbon emissions factor for combusted methane (2.75 t CO ₂ / t CH ₄) |
| CEF_{NMHC} | = Carbon emissions factor for combusted non-methane hydrocarbons (the concentration varies and, therefore, to be obtained through periodical analysis of captured methane) (t CO ₂ / t NMHC) |
| r | = Relative proportion of NMHC compared to methane |
| PC_{CH_4} | = Concentration (in mass) of methane in extracted gas (%), measured on wet basis |
| PC_{NMHC} | = NMHC concentration (in mass) in extracted gas (%) measured on wet basis |

In each end-use, the amount of gas destroyed depends on the efficiency of combustion of each end use.

$$MD_{FL} = CM_{FL} - (PE_{flare}/GWP_{CH_4}) \quad (14)$$

Where:

| | |
|--------------|--|
| MD_{FL} | = Methane destroyed through flaring (t CH ₄) |
| CM_{FL} | = Captured methane delivered to flare (t CH ₄) |
| PE_{flare} | = Project emissions of non-combusted CH ₄ , expressed in terms of CO ₂ e, from flaring of the raw gas stream (t CO ₂ e) |
| GWP_{CH_4} | = Global warming potential of methane (21 t CO ₂ e/tCH ₄) |

The project emissions of non-combusted CH₄ expressed in terms of CO₂e from flaring of the raw gas stream (PE_{flare}) shall be calculated following the procedures described in the “Tool to determine project emissions from flaring gases containing methane”. PE_{flare} can be calculated on an annual basis or for the required period of time using this tool.

Un-combusted methane from project activity

Not all of the methane sent to the flare will be combusted, so a small amount will escape to the atmosphere. These emissions are calculated using the following:

$$PE_{UM} = PE_{flare} \quad (15)$$

Where:

| | |
|--------------|---|
| PE_{UM} | = Project emissions from un-combusted methane (t CO ₂ e) |
| PE_{flare} | = Project emissions of non-combusted CH ₄ expressed in terms of CO ₂ e from flaring of the raw gas stream (t CO ₂ e) |

The project emissions from flaring of the raw gas stream (PE_{flare}) shall be calculated following the procedures described in the “Tool to determine project emissions from flaring gases containing methane”. PE_{flare} can be calculated on an annual basis or for the required period of time using this tool.

Leakage

There are no known sources of emissions leakage caused by the project type.

Emission Reductions

Emission reductions are calculated as follows:

$$ER_y = BE_y - PE_y - LE_y \quad (16)$$

Where:

| | |
|--------|--|
| ER_y | = Emission reductions in year y (t CO ₂ e/yr) |
| BE_y | = Baseline emissions in year y (t CO ₂ e/yr) |
| PE_y | = Project emissions in year y (t CO ₂ /yr) |
| LE_y | = Leakage emissions in year y (t CO ₂ /yr) |

III. MONITORING METHODOLOGY

All data collected as part of monitoring should be archived electronically and be kept at least for 2 years after the end of the last crediting period. 100% of the data should be monitored if not indicated otherwise in the tables below. All measurements should be conducted with calibrated measurement equipment according to relevant industry standards.

In addition, the monitoring provisions in the tools referred to in this methodology apply.

Data and parameters not monitored

In addition to the parameters listed in the tables below, the provisions on data and parameters not monitored in the tools referred to in this methodology apply.

| | |
|---|---|
| Data / parameter: | $CM_{BL,i}$ |
| Data unit: | tCH ₄ |
| Description: | Captured methane that would have been destroyed by use i in the baseline |
| Source of data: | |
| Measurement procedures (if any): | |
| Any comment: | Flow meters will record gas volumes, pressure and temperature. Metered gas volumes are converted to mass using a density of 0.67 kg/m ³ under normal conditions of temperature and pressure. |

| | |
|----------------------------------|---|
| Data / parameter: | CM _{PJ,i} |
| Data unit: | tCH ₄ |
| Description: | Captured methane destroyed by use <i>i</i> in the project activity |
| Source of data: | |
| Measurement procedures (if any): | |
| Any comment: | Flow meters will record gas volumes, pressure and temperature. Metered gas volumes are converted to mass using a density of 0.67 kg/m ³ under normal conditions of temperature and pressure. |

| | |
|----------------------------------|---|
| Data / parameter: | EF _{HEAT} |
| Data unit: | t CO ₂ /GJ |
| Description: | The emission factor of heat replaced by the project |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | <i>Ex ante</i> |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|--|
| Data / parameter: | EF _{GAS} |
| Data unit: | t CO ₂ /GJ |
| Description: | The emission factor of gas grid fuel replaced by the project |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | <i>Ex ante</i> |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|--|
| Data / parameter: | EF _{CO₂,i} |
| Data unit: | t C/TJ |
| Description: | The emission factor of fuel used in captive power generation |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | <i>Ex ante</i> |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|---|
| Data / parameter: | CEF _{ELEC} |
| Data unit: | t CO ₂ /MWh |
| Description: | Carbon emission factor for electricity used by the project activity |
| Source of data: | Calculated using the combined margin method in the “Tool to calculate the emission factor for an electricity system”. US based projects can use the EPA’s eGRID database for the grid sub-region in which the project is located. |
| Measurement procedures (if any): | |
| Monitoring frequency: | <i>Ex ante</i> |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|---|
| Data / parameter: | CEF _{FossFuel} |
| Data unit: | t CO ₂ /GJ |
| Description: | Carbon emission factor for fossil fuel used by the project activity to capture and use or destroy methane |
| Source of Data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | <i>Ex ante</i> |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|---|
| Data / parameter: | CEF _{CH4} |
| Data unit: | t CO ₂ / t CH ₄ |
| Description: | Carbon emission factor for combusted methane captured by the project activity |
| Source of Data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | <i>Ex ante</i> |
| QA/QC procedures: | |
| Any comment: | Set at 2.75 t CO ₂ / t CH ₄ |

| | |
|----------------------------------|---|
| Data / parameter: | CEF _{HEAT} |
| Data unit: | t CO ₂ /GJ |
| Description: | Carbon emission factor of heat used by the project activity |
| Source of Data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | <i>Ex ante</i> |
| QA/QC procedures: | |
| Any comment: | |

Data and parameters monitored

| | |
|----------------------------------|---|
| Data / parameter: | GEN |
| Data unit: | MWh |
| Description: | Electricity generated by the project activity |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Continuous |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|--|
| Data / parameter: | HEAT |
| Data unit: | GJ |
| Description: | Heat generated by the project activity |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Continuous |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|---|
| Data / parameter: | GAS |
| Data unit: | GJ |
| Description: | Gas delivered to natural gas distribution grids and supplied to end users by the project activity. |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Continuous |
| QA/QC procedures: | |
| Any comment: | Gas flow meters will measure methane injected into pipelines. The energy content of methane is determined by converting this volumetric measurement to energy. Utility sales invoices should be used where available. |

| | |
|----------------------------------|--|
| Data / parameter: | EF_{ELEC} |
| Data unit: | t CO ₂ /MWh |
| Description: | The emission factor of electricity replaced by the project |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Annually or <i>Ex ante</i> |
| QA/QC procedures: | |
| Any comment: | If grid electricity is replaced by the project, the combined margin emission factor should be calculated annually using “Tool to calculate the emission factor for an electricity system” For projects based in the United States, emission factors from the US EPA’s eGRID database corresponding to the grid sub-region in which the project is located can be used. |

| | |
|----------------------------------|---|
| Data / parameter: | $Eff_{captive}$ |
| Data unit: | % |
| Description: | The efficiency of captive power generation |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Annually |
| QA/QC procedures: | |
| Any comment: | Annual average electrical efficiency based on the lower heating value of the fuel |

| | |
|----------------------------------|--|
| Data / parameter: | Eff_{heat} |
| Data unit: | % |
| Description: | Boiler efficiency of the heat generation |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Annually |
| QA/QC procedures: | |
| Any comment: | Annual average thermal efficiency based on the lower heating value of the fuel |

| | |
|----------------------------------|---|
| Data / parameter: | Eff _{processing} |
| Data unit: | % |
| Description: | The efficiency of gas processing including cleanup, compression, and upgrading prior to injection into gas grids. Combined efficiency including losses for use as fuel, flaring, venting and fugitive emissions. Only to be used if gas sales metered before processing facility. |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Continuously or Annually |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|--|
| Data / parameter: | CONS _{ELEC,PJ} |
| Data unit: | MWh |
| Description: | Additional electricity consumption for capture and use or destruction of methane |
| Source of data: | Project site |
| Measurement procedures (if any): | Taken from machinery data acquisition systems or utility bills |
| Monitoring frequency: | Continuously |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|---|
| Data / parameter: | CONS _{HEAT,PJ} |
| Data unit: | GJ |
| Description: | Additional heat consumption for capture and use or destruction of methane |
| Source of data: | Project site |
| Measurement procedures (if any): | Taken from machinery data acquisition systems or utility bills |
| Monitoring frequency: | Continuously |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|--|
| Data / parameter: | $CONS_{FossFuel,PJ}$ |
| Data unit: | GJ |
| Description: | Additional fossil fuel consumption for capture and use or destruction of methane |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Continuously |
| QA/QC procedures: | |
| Any comment: | |

| | |
|----------------------------------|---|
| Data / parameter: | CEF_{NMHC} |
| Data unit: | t CO ₂ / t NMHC |
| Description: | Carbon emission factor for combusted non methane hydrocarbons captured by the project activity |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Annually |
| QA/QC procedures: | |
| Any comment: | To be obtained through annual analysis of the fractional composition of captured gas delivered to end users |

| | |
|----------------------------------|---|
| Data / parameter: | CM_{FL} |
| Data unit: | t CH ₄ |
| Description: | Captured methane delivered to a flare and combusted |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Continuously |
| QA/QC procedures: | |
| Any comment: | Flow meters will record gas volumes, pressure and temperature. Metered gas volumes are converted to mass using a density of 0.67 kg/m ³ under normal conditions of temperature and pressure. |

| | |
|----------------------------------|---|
| Data / parameter: | CM _{ELEC} |
| Data unit: | t CH ₄ |
| Description: | Captured methane delivered to a power plant |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Continuously |
| QA/QC procedures: | |
| Any comment: | Flow meters will record gas volumes, pressure and temperature. Metered gas volumes are converted to mass using a density of 0.67 kg/m ³ under normal conditions of temperature and pressure. |

| | |
|----------------------------------|---|
| Data / parameter: | CM _{MECH} |
| Data unit: | t CH ₄ |
| Description: | Captured methane destroyed through mechanical energy generation |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Continuously |
| QA/QC procedures: | |
| Any comment: | Flow meters will record gas volumes, pressure and temperature. Metered gas volumes are converted to mass using a density of 0.67 kg/m ³ under normal conditions of temperature and pressure. |

| | |
|----------------------------------|---|
| Data / parameter: | CM _{HEAT} |
| Data unit: | t CH ₄ |
| Description: | Captured methane delivered to a heat plant |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Continuously |
| QA/QC procedures: | |
| Any comment: | Flow meters will record gas volumes, pressure and temperature. Metered gas volumes are converted to mass using a density of 0.67 kg/m ³ under normal conditions of temperature and pressure. |

| | |
|----------------------------------|---|
| Data / parameter: | CM _{GAS} |
| Data unit: | t CH ₄ |
| Description: | Captured methane delivered to a natural gas grid |
| Source of data: | Project site |
| Measurement procedures (if any): | |
| Monitoring frequency: | Continuously |
| QA/QC procedures: | |
| Any comment: | Flow meters will record gas volumes, pressure and temperature. Metered gas volumes are converted to mass using a density of 0.67 kg/m ³ under normal conditions of temperature and pressure. |

| | |
|----------------------------------|---|
| Data / parameter: | PC _{CH4} |
| Data unit: | % |
| Description: | Concentration (in mass) of methane in captured gas (%), measured on wet basis |
| Source of data: | Concentration meters, optical and calorific |
| Measurement procedures (if any): | |
| Monitoring frequency: | Hourly/Daily |
| QA/QC procedures: | |
| Any comment: | To be measured on wet basis |

| | |
|----------------------------------|---|
| Data / parameter: | PC _{NMHC} |
| Data unit: | % |
| Description: | Concentration (in mass) of non-methane hydrocarbons in extracted gas (%), measured on wet basis |
| Source of data: | Concentration meters, optical and calorific |
| Measurement procedures (if any): | |
| Monitoring frequency: | Annually |
| QA/QC procedures: | |
| Any comment: | To be measured on wet basis |